

Friday, 20 June 2025

Project number: M250262  
Reference: M250262LT1C

Ryan McKenzie  
Volta Energy Group  
31 Lincoln St, Richmond, VIC, 3121, Australia

**ADVERTISED  
PLAN**

Dear Ryan,

**Springvale Energy Hub  
Acoustic Design Advice**

## 1 Introduction

Volta Energy Group (Volta Energy) is investigating a Battery Energy Storage System (BESS) which will be located between Westall Road and Clarke Road in Springvale South. Volta Energy has engaged Resonate to undertake an environmental noise assessment for the site to inform compliance with applicable noise limits.

This environmental noise assessment has been conducted in accordance with the *Environment Protection Regulations* (the Regulations) and supporting Environment Protection Authority (EPA) Victoria Noise Protocol<sup>1</sup> to assess potential noise impacts on nearby residential dwellings. It:

- summarises relevant legislation, policy and guidelines.
- establishes applicable noise limits.
- presents predicted noise levels considering alternative layout arrangements.
- discusses noise mitigation measures.
- presents the results of background noise monitoring at areas representative of the nearest noise sensitive receivers.

The assessment is based on the following design documentation:

- Layout 'WiP\_Site\_Layout\_01\_WiP Site Layout Rev.A', received 28 May 2025
- Battery container. Tesla Megapack 2XL with 2-hour 9 fan configuration at 100% fan speed for Day and Evening operation and 40% fan speed at Night from Tesla noise test report data in Resonates database.
- 146MVA Substation Transformer. Overall sound power was estimated based on AS/NZS 60076-10 *Power transformers Part 10: Determination of sound levels*.
- 5 m ground elevation data obtained through Elvis database on 29 April 2025.
- Noise sensitive area (NSA) locations based on arial assessment using google earth imagery, 2025 Airbus © Earth observation and geographical data obtained through Geoscape on 29 April 2025.

Any updates to the design of the site will require further modelling to ensure that the noise limits are met at all receivers.

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

<sup>1</sup> EPA Victoria Publication 1826.4, *Noise limit and assessment protocol for the control of noise from commercial, industrial and trade premises and entertainment venues*

## 2 Proposed development

### 2.1 Project location

The proposed development site is located in a Green Wedge Zone (GWZ) within the Greater Dandenong Council local government area on Clarke Road in Springvale South and is nearby to the following existing / proposed industrial facilities, businesses, public spaces and noise sensitive receivers:

- Residential NSRs to the south along Rowans Road (GRZ1),
- Residential NSRs to the east along Clarke Road (GRZ1),
- Residential NSRs along Spring Road Reserve (PPRZ),
- Residential NSRs within the Cambodian Buddhist Association of Victoria (CBAV) (GRZ1),
- Calvary Kingston Gardens Ages Care facility (CKG) (GRZ1),
- Various other businesses towards the east (GRZ1),

Figure 1 shows the BESS site and surrounding noise sensitive receivers.



Figure 1 Aerial of site and surrounding NSAs.

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

## 2.2 Proposed Springvale Energy Hub

### 2.2.1 Site layout

A layout for the Springvale Energy Hub site is presented in Figure 2 and is proposed to have the following noise generating systems:

- 64 x Tesla Megapack 2XL 2-hour 9 fan configurations Battery containers,
- 16 x Step-up transformers (4.6MVA),
- 1 x 146MVA Power Transformer

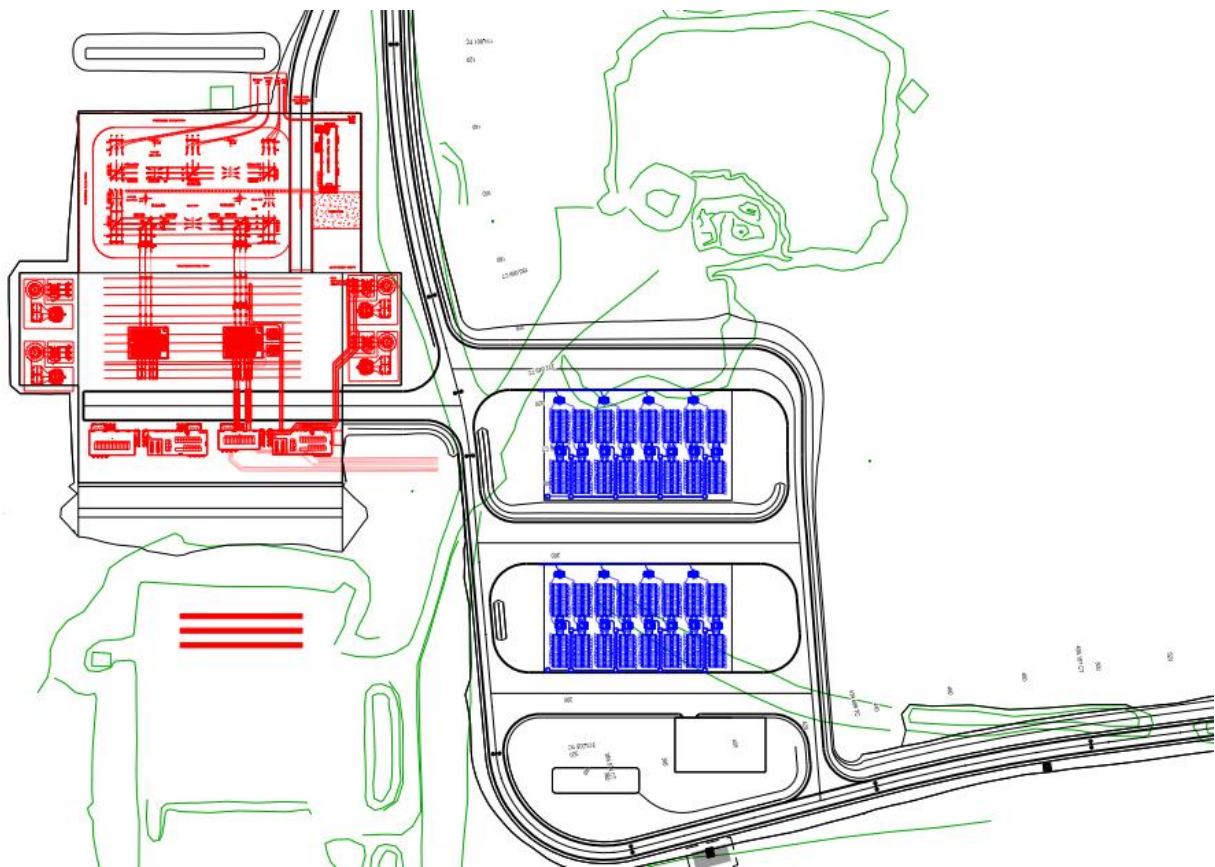


Figure 2 Springvale Hub Site layout - *WiP\_Site\_Layout\_01\_ WiP Site Layout Rev.A*

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

## 2.2.2 Fan Duty Cycles

Tesla provided a Progressive Power Noise Application Note for Springvale BESS (20/05/2025) to estimate maximum fan speed during expected duty cycles. The Megapack 2 XL is configured for 2-hour operation, using all 9 fans to meet thermal load at full power output and 50 °C ambient conditions. Note that, Tesla states a maximum sound pressure level (SPL) of 75 dB(A) at 10 m from any side and advises that the system be represented in noise modelling software as a point source sound power level (SWL) located above a solid structure. In accordance with *Tesla Megapack 2 XL - Sound Data - FN03*, the maximum sound power level is 94 dB(A).

The thermal system is the dominant noise source, with fan load dependent on internal cell temperature and external ambient conditions. Maximum thermal load occurs during sustained high-power operation and elevated ambient conditions. Based on Tesla’s thermodynamic modelling using BOM-scaled profiles (record day: 35 °C; scaled 10-day average: 27.2 °C), and scheduled operation (charging: 9:00am –11:00am; discharging: 5:00pm–7:00pm), the Day, Evening and Night-time fan duty was assessed.

The system has 4 fans cooling the power electronics and 5 for the battery modules. The Tesla data in Figure 3 and Figure 4 shows PE fans idle overnight at 0.2 duty, while battery fans peaks at ~0.5 duty overnight. Using a standard weighted average approach (consistent with ASHRAE practice), the total night-time duty is approximately 37%. On this basis, the Night-time operation is not expected to exceed the simulated 40%-point source fan speed SWL provided by Tesla in *Tesla Megapack 2 XL - Sound Data - FN03*.

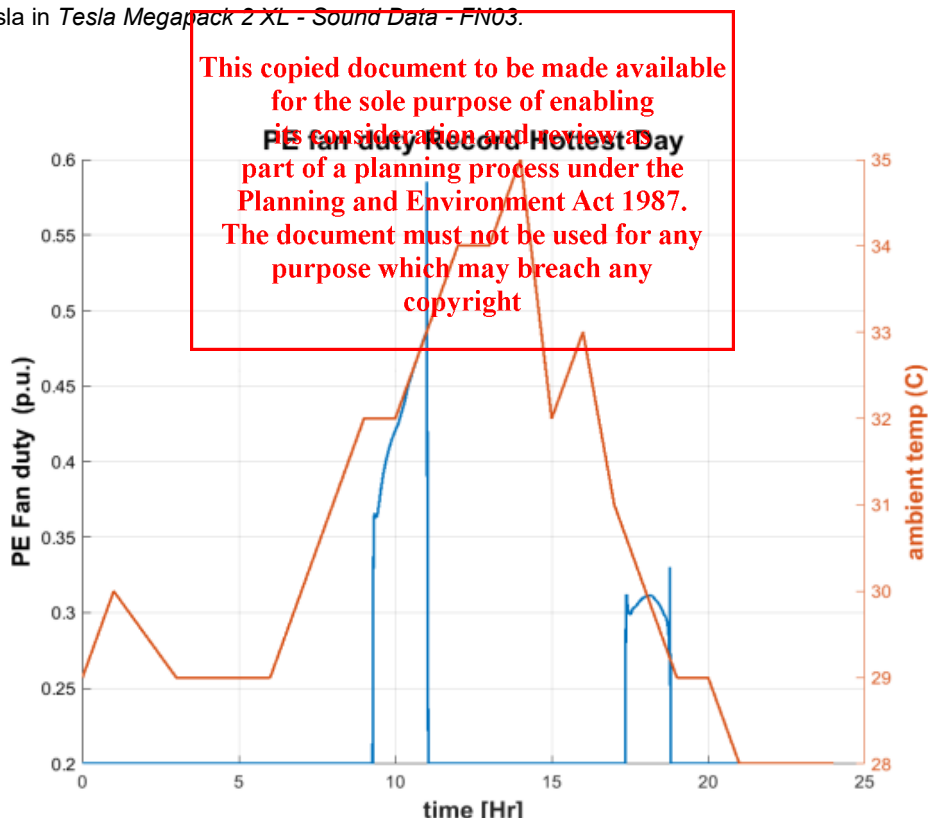


Figure 3 PE Fan Duty Cycle SEH 2hr 9 fan FN003 (*Tesla Progressive Power, SEH Noise Application Note 1.0*)

**ADVERTISED  
PLAN**

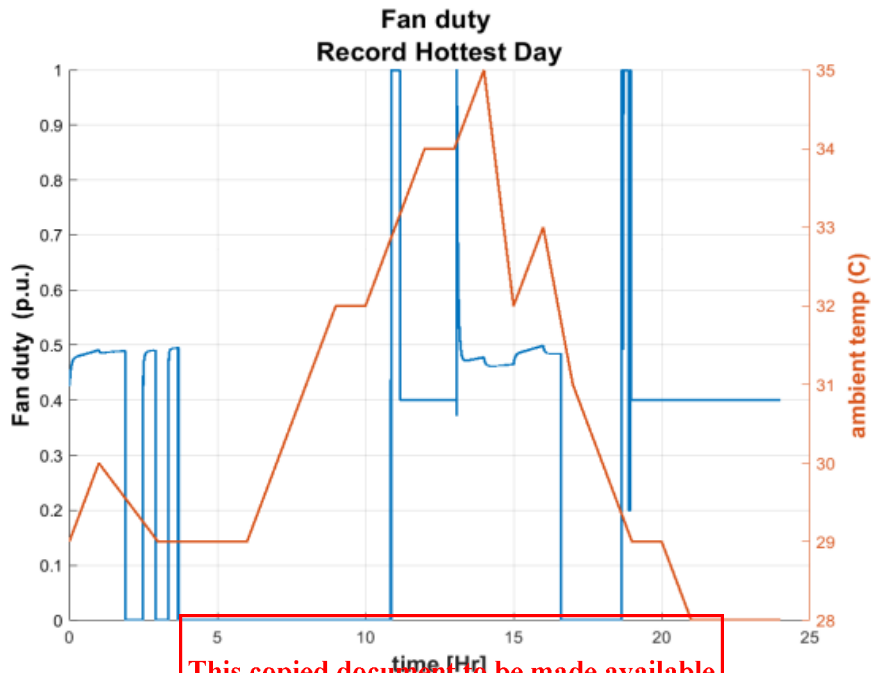


Figure 4 Battery Fan Duty Cycle SEH 2hr fan FN003 (Tesla Progressive Power, SEH Noise Application Note 1.0)

## 2.3 Nearby Representative NSAs

There are 14 residential properties identified around the proposed facility chosen to represent the nearest NSAs to the site. The NSAs have been identified based on a review of aerial photography, Geoscape data and zoning of the surrounding area.

Table 1 describes the approximate distance from each sensitive receiver to the facility boundary.

Table 1 Distance between NSAs and BESS facility

Receiver as shown in Appendix B	Receiver Group	Address	Approximate distance to proposed BESS facility (m)
R1	Clarkes Road	159 Clarke Rd, Springvale South VIC 3172 (CBAV)	230
R4	Clarkes Road	566-568 Springvale Rd, Springvale South VIC 3172	470
R5	Clarkes Road	215 Clarke Rd, Springvale South VIC 3172	480
R6	Clarkes Road	217 Clarke Rd, Springvale South VIC 3172	500
R7	Clarkes Road	221 Clarke Rd, Springvale South VIC 3172	550
R8	Clarkes Road	224 Clarke Rd, Springvale South VIC 3172	520
R10	Rowans Road	1 – 21 Kabi Cct, Springvale South VIC 3172	690
R11	Rowans Road	9 Rowan Rd, Springvale South VIC 3172	670
R12	Rowans Road	1 Rowan Rd, Springvale South VIC 3172	670

Receiver as shown in Appendix B	Receiver Group	Address	Approximate distance to proposed BESS facility (m)
R13	Rowans Road	2 Golden Grove, Springvale South VIC 3172	670
R14	Rowans Road	19-31 Rowan Rd, Springvale South VIC 3172	650
R15 (rural area)	Clarkes Road	92 - 102 Clarke Rd, Springvale South VIC 3172	440
R16	Clarkes Road	102 Spring Rd, Springvale South VIC 3172	530
R17	Spring Road	26 Jaffna Pl, Springvale South VIC 3172	360

## 2.1 Land zoning

The proposed development site is located within a Green Wedge Zone (GWZ), outside the defined Major Urban Area of Melbourne, Victoria. The nearest Spring Road, Clarkes Road and Rowans Road noise-sensitive receivers are situated within a General Residential Zone (GRZ), located within the Major Urban Area (excluding R15).

Although the source is in a rural zone, the Noise Protocol requires that assessment be based on the zoning of the receivers. As such, urban noise limits have been applied at the GRZ receivers, rather than rural limits, to reflect their increased sensitivity and ensure appropriate protection. This approach aligns with the intent of the protocol to safeguard amenity in urban residential areas, regardless of the zoning of the noise source.

A Planning Property Report confirming the zoning and Urban areas of the proposed development site and surrounding areas is provided in Appendix A.

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

**ADVERTISED  
PLAN**

## 3 Legislation, policy and guidelines

### 3.1 Environment Protection Act 2017

#### 3.1.1 General Environmental Duty

The *Environment Protection Act 2017* (the Act) sets out environmental obligations and protections for Victorians. The cornerstone of the Act is the General Environmental Duty (GED), which states:

A person who is engaging in an activity that may give rise to risks of harm to human health or the environment from pollution or waste must minimise those risks, so far as reasonably practicable.

In the context of the Act, 'reasonably practicable' measures mean putting in controls to eliminate the risk of harm to human health and the environment so far as reasonably practicable. If eliminating the risk of harm is not reasonably practicable, then the risk of harm must be reduced so far as reasonably practicable. A number of matters must be considered in deciding what is reasonably practicable in the circumstances:

- the likelihood of those risks eventuating
- the degree of harm that would result if those risks eventuated
- what the person concerned knows, or ought reasonably to know, about the harm or risks of harm and any ways of eliminating or reducing those risks
- the availability and suitability of ways to eliminate or reduce those risks.
- the cost of eliminating or reducing those risks.

EPA Victoria Publication 1856: *Reasonably practicable* explains that, when dealing with a common risk or harm, it is possible to demonstrate that the risk has been reduced so far as reasonably practicable if well-established effective practices or controls have been adopted to eliminate or manage risk. Where well-established practices or controls do not exist, then it is necessary to show that effective controls have been assessed and adopted.

This copied document to be made available  
for the sole purpose of enabling  
its consideration and review as  
part of a planning process under the  
Planning and Environment Act 1987.  
The document must not be used for any  
purpose which may breach any  
copyright

#### 3.1.2 Unreasonable noise

The Act also prohibits the emission of unreasonable noise and aggravated noise. The Act provides a definition for 'Unreasonable noise' in two parts. Section 3(1)(a) states that noise that is unreasonable having regard to the following:

- its volume, intensity or duration
- its character
- the time, place and other circumstances in which it is emitted
- how often it is emitted
- any prescribed factor.

Section 3(1)(b) states that noise is unreasonable noise if it is prescribed to be so. Under the *Environment Protection Regulations*, noise that exceeds the noise limits established in accordance with EPA Victoria Publication 1826.4 *Noise limit and assessment protocol for the control of noise from commercial, industrial and trade premises and entertainment venues* (Noise Protocol) is prescribed to be unreasonable noise.

Unreasonable noise occurs if noise meets the requirements of Section 3(1)(a) and/or Section 3(1)(b) of the Act.

### 3.2 Environment Protection Regulations

The *Environment Protection Regulations* (the Regulations) are subordinate legislation that support the Act. Under the Regulations, the assessment of noise from commercial, industrial and trade premises at noise sensitive areas must be carried out in accordance with the Noise Protocol, both in terms of establishing noise limits as noise sensitive areas and in terms of the measurement of noise from the subject premises.

The noise limits set under the Regulations apply generally to noise emitted from the proposed BESS facility. The noise limits are not applicable to noise that may arise from the following sources that may be relevant to the site:

- construction works
- intruder, emergency or safety alarms or sirens
- equipment used in relation to an emergency
- non-commercial vehicles (except for maintenance activities).

The GED still applies to noise arising from the above sources but compliance with the noise limits set under the Regulations is not mandatory.

Noise sensitive areas are defined in the Regulations as:

- The area within 10 m of the external walls of dwellings (including residential care facilities but excluding caretaker's houses), residential buildings and noise sensitive residential uses.
- The area within 10 m outside the external walls of any dormitories, wards, bedrooms and living rooms of caretaker's houses, hospitals, hotels, motels, residential hotels specialist disability accommodation, corrective institutions, tourist establishments, retirement villages and residential villages.
- The area within 10 m outside the external walls of classrooms or other rooms in which learning occurs at childcare centres, kindergartens, primary schools and secondary schools.

Within the boundary of tourist establishments, campgrounds and caravan parks that are located in rural areas.

The Regulations also define Day, Evening and Night periods for the assessment of noise, reproduced in Table 2.

**Table 2 Applicable time periods**

Time period	Details
Day	Monday to Saturday, 7 am to 6 pm
Evening	Monday to Saturday, 6 pm to 10 pm Sundays and public holidays, 7 am to 10 pm
Night	10 pm to 7 am any day

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright

The Regulations define:

- Unreasonable noise as noise from commercial, industrial and time periods that exceeds the applicable noise limits from the Noise Protocol.
- Aggravated noise as noise commercial, industrial and time periods that exceeds:
  - 75 dB  $L_{Aeq,30m}$  or the Noise Protocol noise limit by more than 15 dB during the day
  - 70 dB  $L_{Aeq,30m}$  or the Noise Protocol noise limit by more than 15 dB during the evening
  - 65 dB  $L_{Aeq,30m}$  or the Noise Protocol noise limit by more than 15 dB during the night.

The Regulations also define frequency spectrum as a prescribed factor for the purposes of establishing unreasonable noise under Section 3(1)(a) of the Act but do not provide specific guidance on assessment frequency spectrum. EPA Victoria Publication 1996 Noise guidelines: Assessing low frequency noise (EPA Victoria Publication 1996) provide detailed guidance on the assessment of low frequency noise for the purposes of establishing whether unreasonable noise is being produced. EPA Victoria Publication 1996 is discussed further in Section 3.4.3.

## ADVERTISED PLAN

## 3.3 Noise Protocol

EPA Victoria has prepared the Noise Protocol to specify methodologies for establishing noise limits for operational noise sources and for assessing noise levels against the noise limits. Compliance with the noise limits defined by the Noise Protocol is required by Regulations and is expected to assist with meeting the GED during the operational phase of the Project.

### 3.3.1 Urban Areas

The Noise Protocol defines different procedures for establishing noise limits depending on whether the noise sensitive receiver is located within a major urban area or rural areas. Major urban areas are defined as those locations within Melbourne's urban growth boundary or within defined areas around major regional centres, such as Ballarat.

The Project is located in an urban area. For urban areas, the Noise Protocol defines noise limits dependent on the following:

- Time of day. Different noise limits apply for the different time periods of Day, Evening and Night.
- Land zoning used to determine the Zoning Level.
- The measured background noise levels in the area in the absence of noise due to commercial, industrial or trade premises used to determine the Background Level.

To determine the applicable noise limits under the Noise Protocol:

- The Zoning Level is determined for a site through the review of the planning scheme and application of Part I, Clause 1.1 of the Noise Protocol.
- The Background Level is determined for each time period through measurement and application of Part 4 of the Noise Protocol. The Background level is classified as:
  - **Low:** where it is more than 9 dB below the Day Zoning Level or more than 9 dB below the Evening or Night Zoning Level.
  - **High:** where it is less than 6 dB below the Day Zoning Level or less than 3 dB below the Evening or Night Zoning Level, including if it is at or above the Zoning Level for any time period.
  - **Neutral:** for all other cases.
- The noise limit is determined as follows:
  - Where the Background Level is Low, the noise limit is set at a fixed level above the average of the Background Level and Zone Level, being 4.5 dB above during the Day and 3 dB above during the Evening and Night.
  - Where the Background Level is Neutral, the noise limit is set at the Zoning Level.
  - Where the Background Level is High, the noise limit is set at a fixed level above the Background Level being 6 dB above during the Day and 3 dB above during the Evening and Night. The noise limit at Night is not permitted to exceed 55 dB  $L_{Aeq,30min}$  regardless of the Background Level.

This copied document to be made available for the independent review of the planning scheme and application of Part I, Clause 1.1 of the Noise Protocol to consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

### 3.3.2 Rural Areas

For rural areas, the Noise Protocol primarily defines noise limits dependent on the following:

- Time of day. Different noise limits apply for the different time periods of Day, Evening and Night.
- Land zoning of both the noise source and noise sensitive receiver used to determine the Zone Level.
- A distance adjustment is applied to the Zone Level where a noise sensitive receiver is in a different zone to a noise source.
- Type of noise source. Specific limits are set for certain noise sources, such as utilities and earth resources.

Background noise levels may be taken into account in establishing noise limits in rural areas where the noise sensitive receiver is located within a 'background relevant area.' Background relevant areas are those rural areas where background levels may be higher than usual and include areas where road traffic is a significant audible source. If a

noise sensitive receiver is located in a background relevant rural area, then the noise limits are set at the higher of the noise limit determined using the land zoning methodology above or:

- The background noise level plus 8 dB for the Day period
- The background noise level plus 5 dB for the Evening period
- The background noise level plus 5 dB for the Night period.

The background noise measurement methodology for rural areas is the same as that for urban areas.

### 3.3.3 EPA Victoria Publication 1996

EPA Victoria Publication 1996 provides guidance on the assessment of low frequency noise from commercial, industrial and trade premises. As frequency spectrum is a separate prescribed factor under the Act, operational sources with the potential to produce a higher relative level of low frequency noise should be separately assessed against this guidance in addition to the noise limits applicable under the *Environment Protection Regulations*.

EPA Victoria Publication 1996 defines low frequency noise as that occurring between the frequency range of 10 Hz and 160 Hz. It provides noise thresholds, in one-third octave bands, with levels above the threshold indicating a potential risk of problematic low frequency noise that would require further consideration, investigation and potentially mitigation.

Table 3 presents the low frequency noise thresholds for predictions and measurements conducted outdoors. The outdoor threshold levels are based on indoor thresholds with an assumed facade noise reduction, as specified by EPA Victoria Publication 1996. For the purposes of this assessment, the outdoor thresholds have been adopted but, should a risk of exceedance be identified, further investigation of the specific building facade could be undertaken.

**Table 3 Outdoor low frequency noise thresholds**

Outdoor noise level in dB $L_{eq}$ at one-third octave band centre frequency in Hz												
10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
92	89	86	77	69	61	54	50	50	48	48	46	44

EPA Victoria Publication 1996 notes that not all of the one-third octave bands listed above need to be considered as part of a low frequency noise assessment. Table 4 identifies those one-third octave bands that are relevant based on the predicted C-weighted noise level at a noise sensitive receiver.

**Table 4 C-weighted noise level below which stated one-third octave bands can be discarded for assessment**

C-weighted noise level at noise sensitive receiver, dB $L_{Ceq}$	One-third octave bands which can be discarded
> 76 dB	None
≤ 76	10 Hz only
≤ 71	10 Hz and 12.5 Hz
≤ 66	10 Hz to 16 Hz
≤ 60	10 Hz to 20 Hz
≤ 54	10 Hz to 25 Hz

## 4 Noise survey

### 4.1 Unattended noise measurements

Unattended noise monitoring was conducted at the two locations shown in figure 5 between 16 – 23 February 2025 to determine the background noise level at relevant areas around the site. The measurements have been conducted and analysed in general accordance with EPA Victoria Publication 1997 *Technical guide: Measuring and analysing industry noise and music noise*.

Measurement location A and B are considered to be a relevant background area to the NSAs on Clarke Road and Rowen’s Road respectively. NSAs in the North have been assessed using the zoning level. We note that using zoning levels is more stringent than assessing NSAs with background noise level.

The background noise environment at location A and B was observed to be controlled by local activities, birds, and road traffic noise from Westall Road, with noise levels lower during the Evening and Night periods when less traffic occurs.

Figure 6 shows noise monitoring locations.

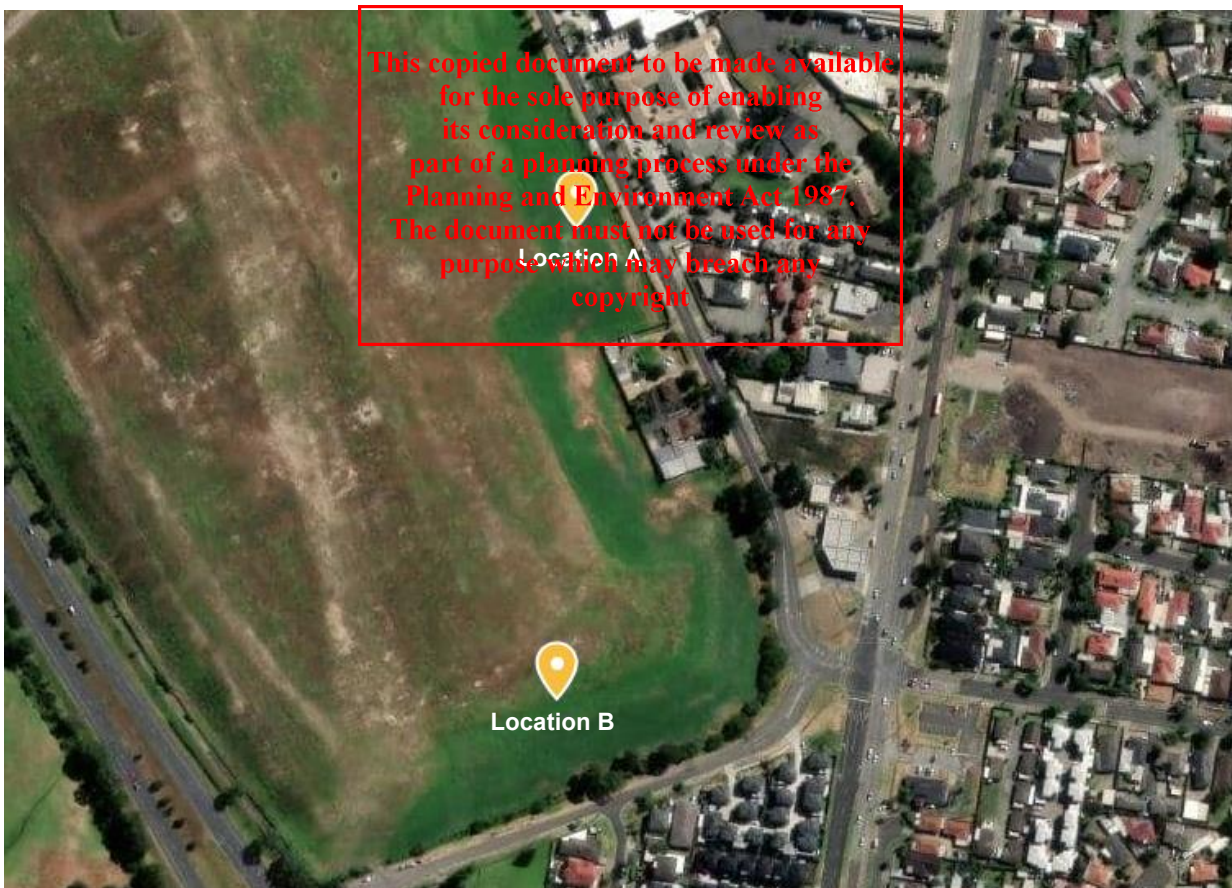


Figure 6 Noise monitoring locations

The measured background noise levels and ambient noise levels during the Day, Evening and Night periods at all measurement locations are presented in Table 5.

**Table 5 Measured background levels and ambient noise levels**

Location	Background Level, dB LA90			Ambient noise level, dB LAeq	
	Day	Evening	Night	6 am – 10 pm	10 pm – 6 am
Location A (Svan)	44	45	42	55	47
Location B (Rion)	50	49	42	56	51

Details on the noise measurements are included in Appendix C, including photographs of the monitoring locations, details on the noise measurement equipment used and additional information on the results.

## 4.2 Equipment

A list of the equipment used in the noise survey is provided in Table 6.

**Table 6 Instruments used for noise measurements**

Instrument	Model and location	Serial number	Laboratory calibration valid to
Sound level meter	Svan 977 (Location A)	SN99041	11 May 2025
Sound level meter	Rion NL – 42 (Location B)	SN00946979	19 August 2025
Acoustical calibrator	Bruel & Kjaer Type 4231	SN2385016	January 20 2026

All items of equipment carry a current certificate of calibration from a National Association of Testing Authorities accredited laboratory. Field calibrations conducted before and after the measurement period deemed the measurements valid.

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

## 5 Environmental noise limits

### 5.1 Urban Area Noise limits

The following sections provide information regarding the relevant noise limits applicable to environmental noise emissions from the project under the Environment Protection Regulations. Noise emissions subject to the Environment Protection Regulations that exceed the applicable noise limits are prescribed to be unreasonable noise as defined under the Environment Protection Act.

The determination of noise limits for this project has been undertaken under the urban area method, since this project is located in a major urban area, as defined by the Environment Protection Regulations.

The environmental noise limits that apply at noise sensitive area, such as residential areas, with respect to noise due to commercial, industrial and trade operations are dependent on:

- Zoning Levels, which are determined based on the planning scheme zoning types within 70 m and 200 m radii of the noise sensitive receiver.
- The time of day, with different limits applying for different time periods.
- The Background Level at the noise sensitive area, in the absence of noise due to commercial, industrial or trade operations.

For the purposes of this assessment and in the absence of background noise measurements for receivers on Spring Road, the Background Level has been assumed to be "Neutral" meaning that the noise limits are equivalent to the defined Zoning Levels. We note that this approach is generally conservative for the assessment of environmental noise in urban areas of metropolitan Melbourne. It also provides protection against the potential for background noise levels to change between locations of times of year.

**This copied document to be made available for the use of background noise measurements for receivers on Spring Road, the Background Level has been assumed to be "Neutral" meaning that the noise limits are equivalent to the defined Zoning Levels. We note that this approach is generally conservative for the assessment of environmental noise in urban areas of metropolitan Melbourne. It also provides protection against the potential for background noise levels to change between locations of times of year.**

**The document must not be used for any purpose which may breach any copyright**

The noise limits at the nearest noise sensitive receivers have been calculated and are presented in Table 7.

**Table 7 Environmental noise limits for normal operation**

Noise sensitive area	Time period	Zoning Level	Background Level	Classification	Noise Limit
		dB LAeq	dB LA90		dB LAeq
Clarke Road Receivers (excluding R15)	Day	50	44	High	50
	Evening	44	45	High	48
	Night	39	42	High	45
Rowans Road Receivers	Day	50	50	High	56
	Evening	44	49	High	52
	Night	39	42	High	45
Spring Road Receivers	Day	53	See note (1)	Neutral	53
	Evening	46	See note (1)	Neutral	46
	Night	41	See note (1)	Neutral	41

(1) The receivers along Spring Road have been assessed as neutral in the absence measured background noise.

## 5.1 Rural Area Noise limits

The determination of noise limits for this receiver 15 has been undertaken under the rural area method, since this project is located outside of a major urban area, as defined by the Environment Protection Regulations.

The environmental noise limits that apply at noise sensitive area, such as residential areas, with respect to noise due to commercial, industrial and trade operations are dependent on:

- Zone Levels, which are determined based on the land zoning of the noise source and noise sensitive receiver.
- Distance adjustment, which is dependent on changes in land zoning between the noise source and noise sensitive receiver, and distances to zone boundaries.
- The type of noise source, with different processes applied to establish noise limits for utilities and earth resources.
- The time of day, with different limits applying for different time periods.

The Background Level at the noise sensitive area, in the absence of noise due to commercial, industrial or trade operations, may also affect the applicable noise limit. However, in rural areas, the Background Level is only used where the area can be described as a background relevant area. Background relevant areas are those where background levels may be higher than usual due to a consistently higher noise source, such as freeway or highway traffic, or coastal areas where background levels are influenced by the sound of surf. Given that the properties proximity to Westall Road we have assessed R15 (92 – 102 Clark Road) as a background relevant area.

The noise limits at the nearest noise sensitive receivers have been calculated and are presented in **Table 8**.

**Table 8 Environmental noise limits for normal operation**

Noise sensitive area	Time period	Zone Level	Distance adjustment	Background Level	Background relevant area?	Noise Limit
		dB LAeq	dB	dB LA90		dB LAeq
R15 (92 – 100 Clark Road)	Day	45	0	44	Yes	52
	Evening	38	0	45	Yes	50
	Night	33	0	42	Yes	47

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

## 6 Environmental noise assessment

### 6.1 Noise prediction methodology

An environmental noise model for noise emissions generated by the proposed BESS site was developed using a proprietary noise modelling software package, SoundPLAN version 9.0.

The environmental noise prediction methodology provided in the international standard ISO 9613-2 was adopted for the prediction model. The methodology takes the following into considerations:

- geometrical divergence (for source descriptions refer to section 6.2)
- atmospheric absorption
- ground effect ( $G = 0.5$  for typical suburban area with 50 % grass covered and 50% hard surface)
- reflection from surfaces
- screening by obstacles.

The ISO 9613-2 methodology provides a prediction representative of conditions where the receiver is downwind of the source in a light breeze or under a moderate ground-based temperature inversion.

The NSA locations were determined from aerial photography as shown in Appendix B.

### 6.2 Noise sources

#### Tesla MP battery container

Noise modelling for the site has been assessed with all equipment listed above operating simultaneously with the 2h Tesla Megapacks running at full mode (100%) between day and evening time periods and 40% mode at Night 7 days per week. Tesla MP battery containers were represented as point sources 0.5 m above the centroid of an 8.84 m x 1.65 m, 2.51 m solid structure.

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

The A-weighted sound power spectrum for 100% and 40% fan speed modes of operation is presented in Table 9 (refer to section 2.2.2 for detail). The data used in our assessment was adopted from *Tesla Megapack 2 XL - Sound Data - FN03* in Resonates database and has been cross checked against the data provided by Volta Energy.

**Table 9 Sound power spectrum for Tesla MP 2XL containers adopted for assessment**

Equipment	Sound power level in dB L <sub>WA</sub> at octave band centre frequency (Hz)								Overall L <sub>WA</sub>
	63	125	250	500	1000	2000	4000	8000	
Tesla MP 2XL Data 100%	65	78	89	90	88	84	74	65	94
Tesla MP 2XL Data 40%	61	81	77	78	77	72	60	61	85

#### Substation transformers

No candidate transformer has been selected at this stage however it has been confirmed that one large substation 146 MVA transformer will reside within the site.

Table 10 presents the sound power spectra for a 146 MVA transformer estimated based on AS/NZS 60076-10 *Power transformers Part 10: Determination of sound levels*. The profile of the sound power spectrum was estimated based on previous measurements by Resonate.

**Table 10 146 MVA transformer sound power spectrum**

Equipment	Sound power level in dB L <sub>WA</sub> at octave band centre frequency (Hz)								Overall
	63	125	250	500	1000	2000	4000	8000	dB L <sub>WA</sub>
146 MVA transformer	76	95	81	82	80	76	69	63	96

## Other equipment

It is noted that additional equipment would be installed at a BESS site including smaller capacity transformers that support the batteries. Based on prior experience, the sound power levels of these transformers are significantly lower than (more than 10 dB below) those from total of the battery units and the noise emissions from the BESS will be controlled by the equipment identified in the sections above.

## 6.3 Noise character adjustments

According to the Noise Protocol, a measured or predicted noise level needs to be adjusted for noise characteristics to derive the Effective Noise Level for the assessment. The Effective Noise Level, with noise character adjustment, is then assessed against the noise limit.

Potential duration and noise character adjustments are discussed below:

- **Duration adjustment (potential reduction):** When the noise emission is not audible over the whole of a continuous 30-minute period, then a duration adjustment based upon the total amount of time for which the noise is audible over that continuous 30-minute period shall be determined in accordance with Item 3.3 of Noise Protocol.
- **Impulsive adjustment (potential increase):** When the noise emission is impulsive in character, then any impulse noise emission event shall be considered to be audible for 10 seconds after the occurrence of the event for the purposes of determining the duration adjustment. Then, an adjustment shall be made as follows:
  - When the impulsive character of the noise is just detectable then the adjustment of +2 dB.
  - When the impulsive character of the noise is prominent then the adjustment of +5 dB.
- **Intermittency adjustment (potential increase):** When the noise emission is intermittent or variable and the noise emission, when measured by a sound level meter set to F time-weighting and A frequency weighting, increases in level rapidly on at least two occasions during a 30-minute period and maintains the level for at least a one-minute duration, then an adjustment determined shall be made in accordance with Item 3.4 of Noise Protocol.
- **Tonal adjustment (potential increase):** When the noise is tonal in character then an adjustment shall be made as follows:
  - When the tonal character of the noise is just detectable then a tonal adjustment of +2 dB applies.
  - When the tonal character of the noise is prominent then a tonal adjustment of +5 dB applies.

In accordance with Schedule 2 of Noise Protocol, the Effective Noise Level is then derived by applying any determined character adjustments to the measured or predicted L<sub>Aeq</sub> noise level for assessment against the noise limits.

For the current assessment we note that:

- Duration: It has been assumed that the proposed BESS site would operate continuously over a 30-minute period. Therefore, no duration adjustment has been applied.
- Impulse: The noise from the site is expected to be steady in nature. Therefore, no adjustment has been applied for impulsive noise.
- Intermittency: The noise from the site is expected to be steady in nature and not intermittent over a 30-minute assessment period. Therefore, no adjustment has been applied for intermittency.
- Tonality: The investigation of main noise contributors at the NSAs within the prediction model demonstrates that the noise emission from the substation transformer is more than 10 dB lower than overall noise level from the BESS at NSAs so transformer noise is unlikely to be detectable at NSAs. Consequently, no adjustment has been applied for tonality.

## 6.4 Predicted noise level Day and Evening periods

Table 11 presents the predicted noise levels from the BESS site at NSAs during the Day and Evening periods against the applicable noise limits.

Table 11 Predicted noise levels at NSAs against Day and Evening limits

Noise sensitive area	Predicted noise level, dB L <sub>Aeq</sub>	Day / Evening limit, dB L <sub>Aeq</sub>	Compliance Day / Evening
R1	46	50 / 48	✓ / ✓
R4	45	50 / 48	✓ / ✓
R5	46	50 / 48	✓ / ✓
R6	43	50 / 48	✓ / ✓
R7	43	50 / 48	✓ / ✓
R8	46	50 / 48	✓ / ✓
R10	41	50 / 48	✓ / ✓
R11	44	50 / 48	✓ / ✓
R12	42	50 / 48	✓ / ✓
R13	42	56 / 52	✓ / ✓
R14	45	56 / 52	✓ / ✓
R15 (rural area)	44	52 / 50	✓ / ✓
R16	40	49 / 44	✓ / ✓
R17	42	50 / 48	✓ / ✓

From the table above it can be seen that the predicted noise levels from the battery storage facility is within the Day, and Evening noise limits at all locations.

A noise map for the BESS is provided in Appendix A.

**ADVERTISED  
PLAN**

## 6.5 Predicted noise level for Night-time period

Table 12 presents the predicted noise levels from the BESS site at NSAs during the Night-time periods against the applicable noise limits.

**Table 12 Predicted noise levels at NSAs against Night-time limits**

Noise sensitive area	Predicted noise level, dB LAeq	Night limit, dB LAeq	Compliance Night
R1	36	45	✓
R4	35	45	✓
R5	36	45	✓
R6	33	45	✓
R7	33	45	✓
R8	35	45	✓
R10	32	45	✓
R11	33	45	✓
R12	31	45	✓
R13	33	45	✓
R14	34	45	✓
R15 (rural area)	36	47	✓
R16	31	39	✓
R17	35	45	✓

From the table above it can be seen that the predicted noise levels from the battery storage facility is within the Day, Evening and Night-time noise limits at all locations.

A noise map for the BESS is provided in Appendix A.

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

## 7 Conclusion

An environmental noise assessment for the proposed Springvale Energy Hub site has been conducted.

The predicted noise level from Springvale Energy Hub was assessed in general accordance with the *Environment Protection Regulations* and Noise Protocol.

Noise monitoring was conducted between 16 – 23 April 2025 to determine the background noise level at relevant areas and establish noise limits at each receiver as per the rural and urban method. The measurement results demonstrated that measured background levels were higher than Zone Levels at NSAs so adjustments from background noise levels were applied to applicable noise limits.

Predicted noise levels from the proposed BESS with the proposed battery container (Tesla Megapack 2XL) are compliant with the Noise Protocol limits during all time periods when the battery containers operate at 100% fan speed for Day and Evening and operate at 40% fan speed at Night.

Please let me know if you have any queries or wish to discuss the above.

Yours sincerely,



Andrea Hempshall  
Acoustic Consultant  
p +61 3 9020 3888  
m +61 430 418 558  
andrea.hempshall@resonate-consultants.com

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

## Appendix A – Noise Maps

**ADVERTISED  
PLAN**

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**



This copied document to be made available  
 for the sole purpose of enabling  
 its consideration and review as  
 part of a planning process under the  
**ADVERTISED PLAN**  
 Planning and Environment Act 1987.  
 The document must not be used for any  
 purpose which may breach any  
 copyright

## Springvale Energy Hub

Predicted noise level for 64 x Tesla Megapack 2XL 2-hour 9 fan at 100% fan speed

### Legend

- Tesla Megapack 2XL
- Predicted noise level dB(A)
- < 30 dB(A)
- 30 - 35 dB(A)
- 35 - 40 dB(A)
- 40 - 45 dB(A)
- 45 - 50 dB(A)
- > 50 dB(A)

146MVA Substation Transformer not shown.

<b>PROJECT NUMBER</b>	M250626
<b>DRAWN BY</b>	ACH
<b>CHECKED BY</b>	XL
<b>DATE ISSUED</b>	28/05/25
<b>CLIENT</b>	Volta Energy Group
<b>BATTERIES</b>	Tesla MP 2XL
<b>RECEIVER HEIGHT</b>	1.5m
<b>IMAGERY</b>	(c) Google



100 200 m



Datum WGS 84, Projection UTM ZONE 55S

# Resonate

www.resonate-consultants.com










## Springvale Energy Hub

Predicted noise level for 64 x Tesla Megapack 2XL 2-hour 9 fan at 40% fan speed

<b>PROJECT NUMBER</b>	M250626
<b>DRAWN BY</b>	ACH
<b>CHECKED BY</b>	XL
<b>DATE ISSUED</b>	28/05/25
<b>CLIENT</b>	Volta Energy Group
<b>BATTERIES</b>	Tesla MP 2XL
<b>RECEIVER HEIGHT</b>	1.5m
<b>IMAGERY</b>	(c) Google

### Legend

-  Tesla Megapack 2XL
- Predicted noise level dB(A)**
-  <math>< 30\text{ dB(A)}</math>
-  30 - 35 dB(A)
-  35 - 40 dB(A)
-  40 - 45 dB(A)
-  45 - 50 dB(A)
-  > 50 dB(A)

146MVA Substation Transformer not shown.



100 200 m



Datum WGS 84, Projection UTM ZONE 55S


**Resonate**

www.resonate-consultants.com

## Appendix B – Vic reports

### ADVERTISED PLAN

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

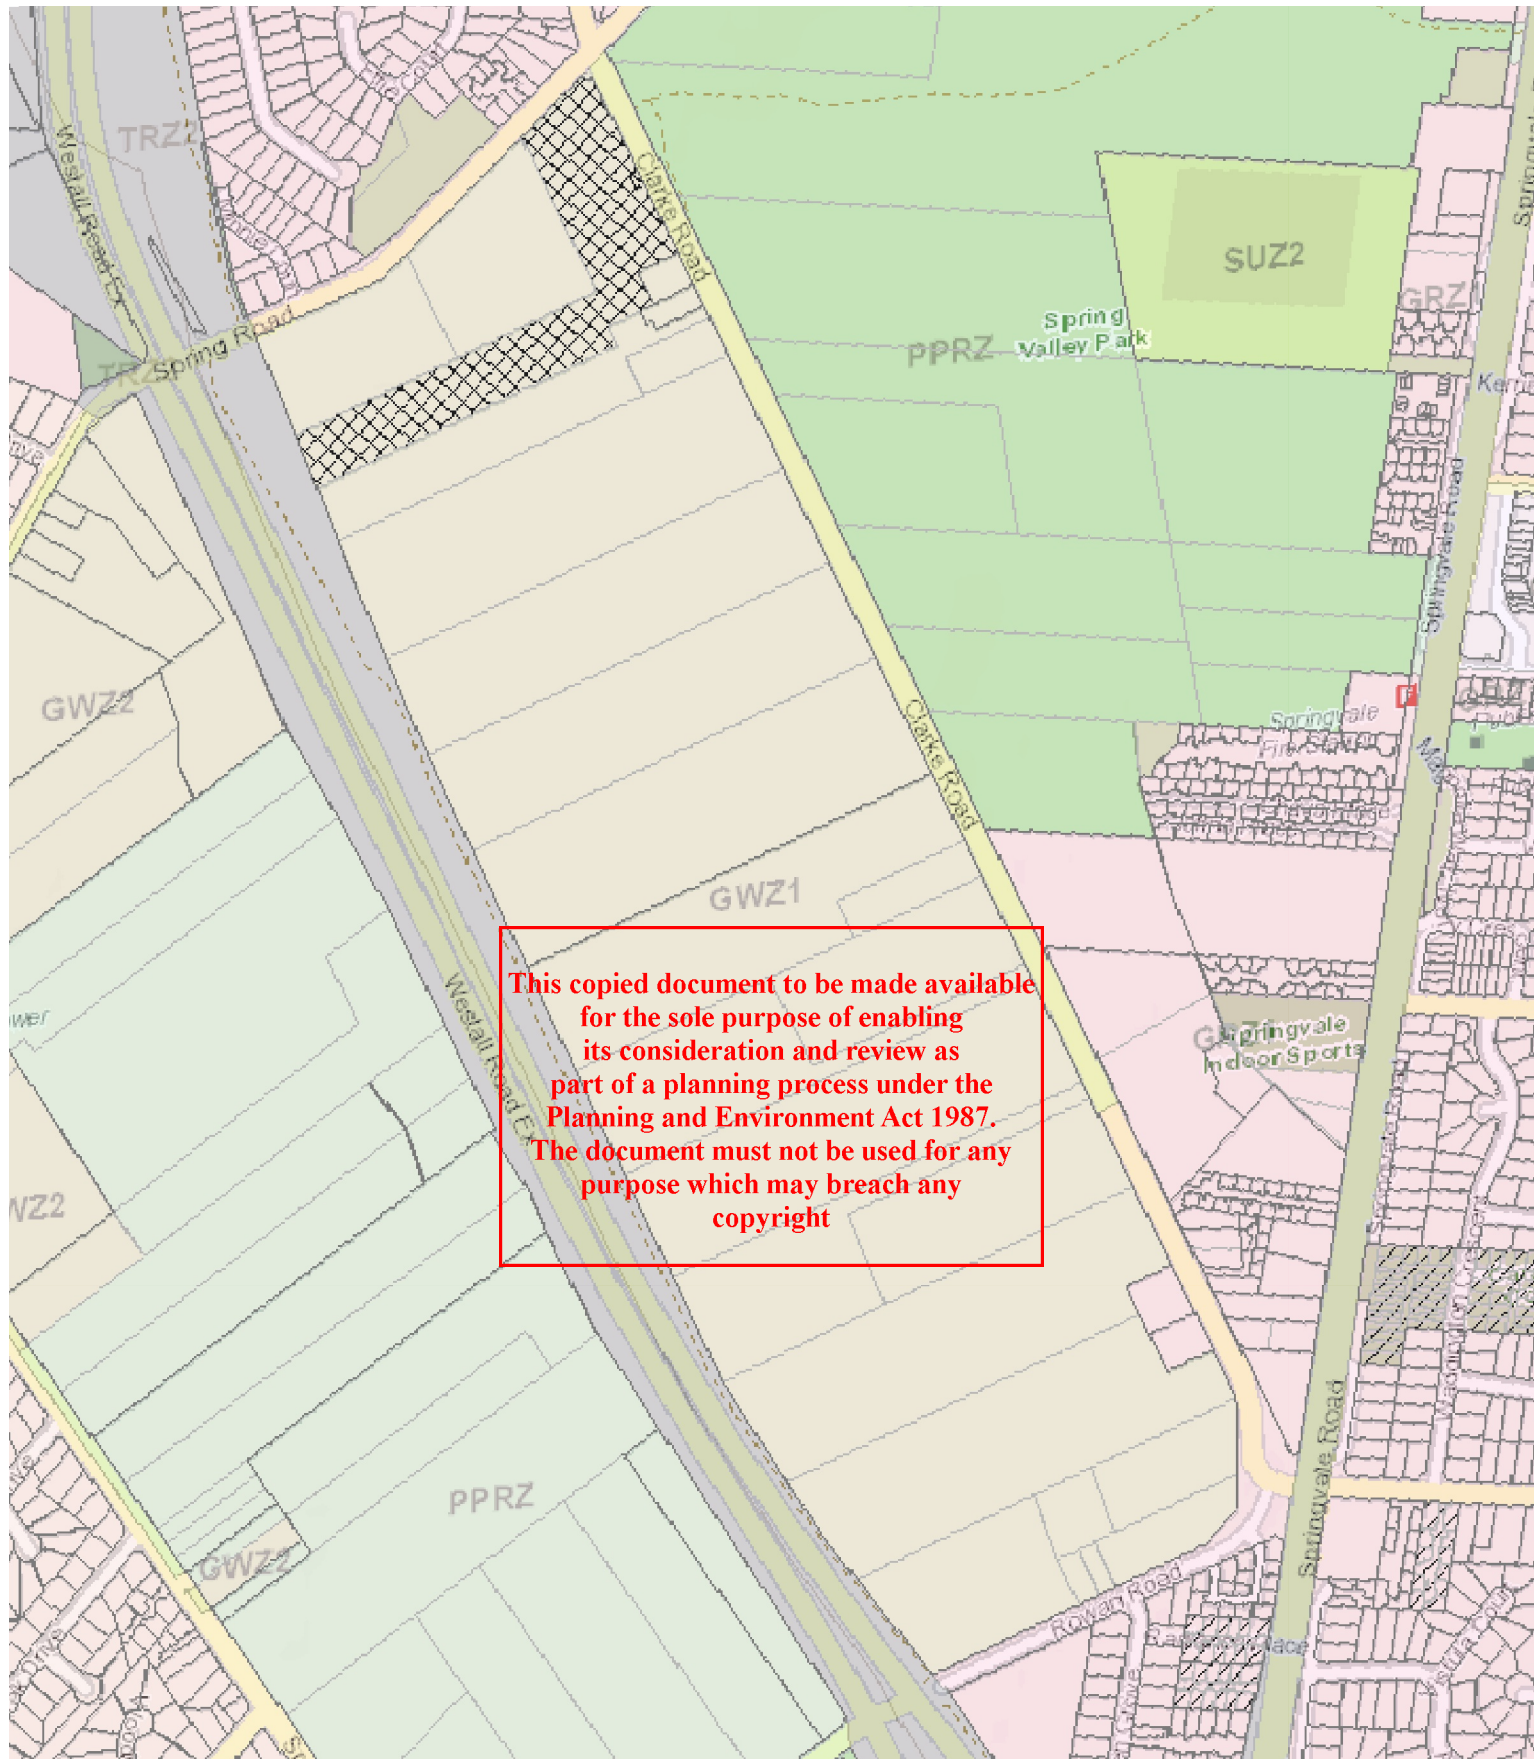

**Vic Planning Map**  
 Planning Scheme - Greater Dandenong

**Legend**

- CZ1 - Commercial 1
- GRZ - General Residential
- GWZ - Green Wedge
- PPRZ - Public Park and Recreation
- TRZ2 - Principal Road Network

Note: labels for zones may appear outside the actual zone - please compare the labels with the legend.



100 200 m



Datum WGS 84, Projection UTM ZONE 55S

**PROJECT NUMBER** M250626  
**DRAWN BY** ACH  
**CHECKED BY** XL  
**DATE ISSUED** 13/06/25  
**CLIENT** Volta Energy Group  
**IMAGERY** (c) Vic Plan

**ADVERTISED PLAN**

**Resonate**

www.resonate-consultants.com



This copied document to be made available  
 for the sole purpose of enabling  
 its consideration and review as  
 part of a planning process under the  
 Planning and Environment Act 1987.  
 The document must not be used for any  
 purpose which may breach any  
 copyright

**Urban Areas Map**

Springvale Energy Hub

**Legend**

Major Urban Area

**PROJECT NUMBER** M250626  
**DRAWN BY** ACH  
**CHECKED BY** XL  
**DATE ISSUED** 12/06/25  
**CLIENT** Volta Energy Group  
**IMAGERY** (c) Google

ADVERTISED  
 PLAN



200 400 m




Datum WGS 84, Projection UTM ZONE 55S

Resonate

www.resonate-consultants.com

## Appendix C – Noise Measurements

Springvale Energy Hub Location A	
Photograph of noise monitor	
	
Details	
Noise logging dates	16/04/2025 – 23/04/2025
Equipment type and serial number	Svan 977 SN99041
Calibration details	Laboratory calibration valid until 11 May 2025. Field check passed at 94 dB post-logging.

**ADVERTISED  
PLAN**


**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

# ADVERTISED PLAN




Acoustics • EMF • Structural Dynamics • Vibration

## Wednesday - 16 April

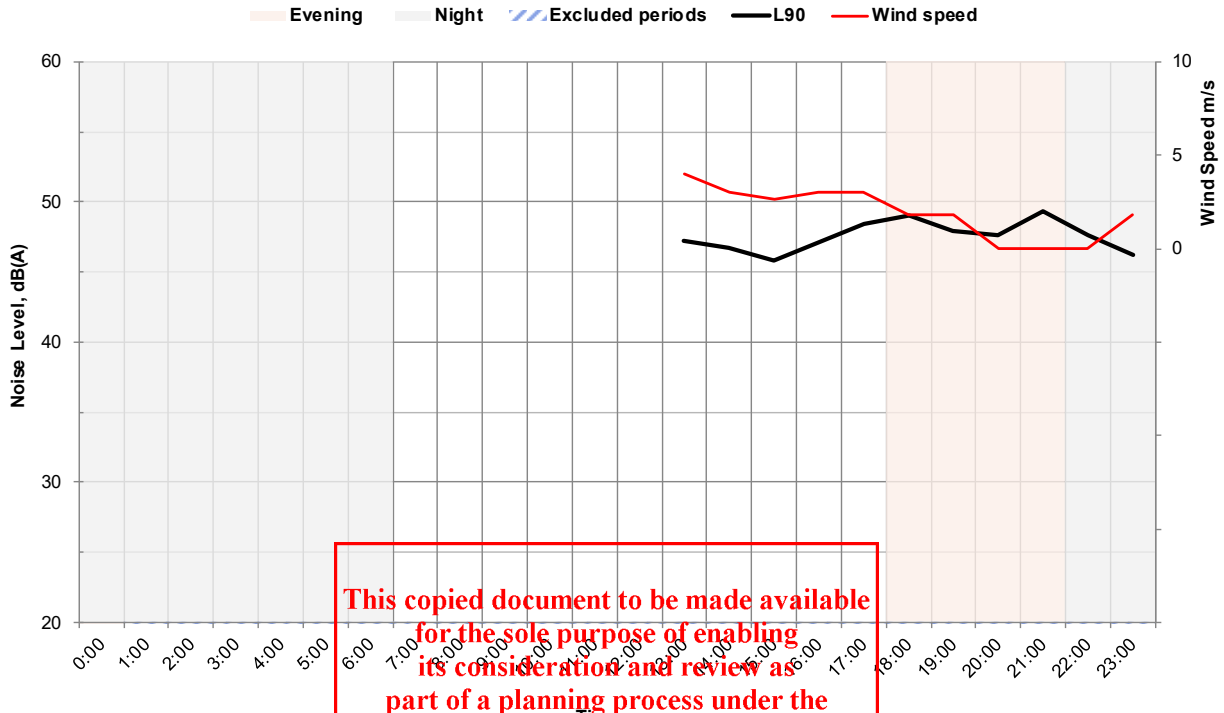

This copied document to be made available  
 for the sole purpose of enabling  
 its consideration and review as  
 part of a planning process under the  
 Planning and Environment Act 1987.  
 The document must not be used for any  
 purpose that may be a breach of any  
 copyright.

## Thursday 17 April

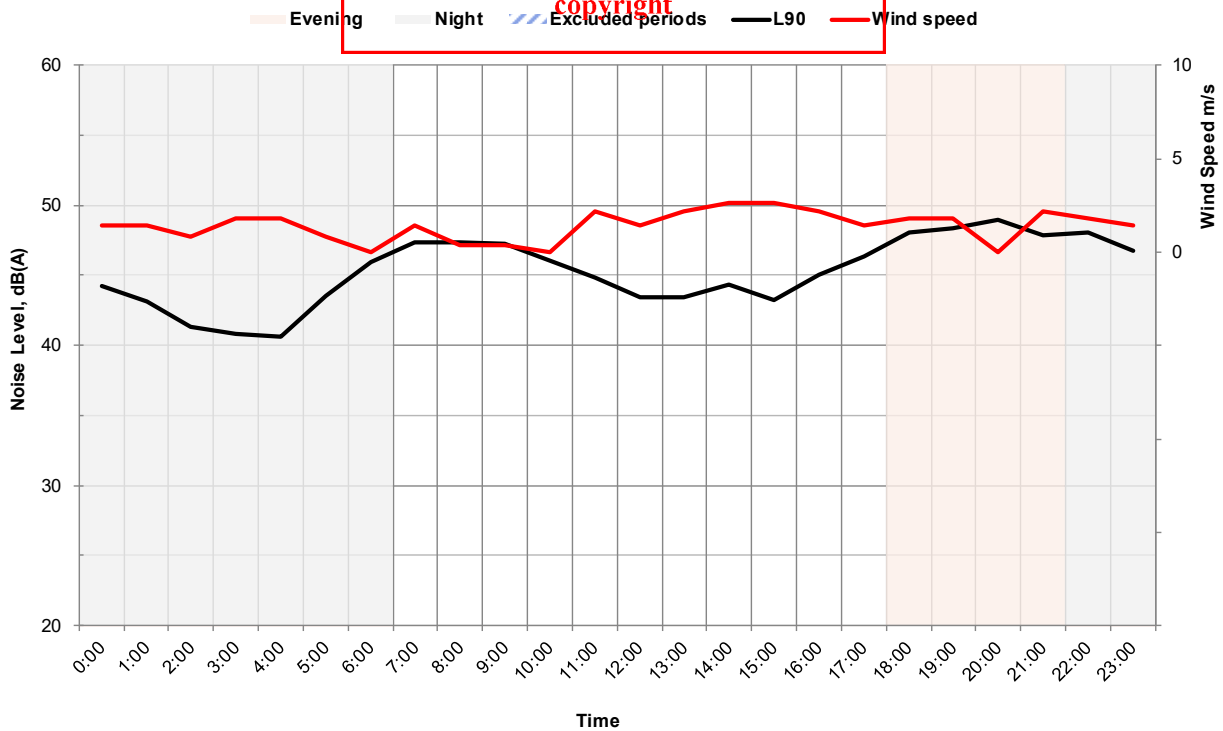


# ADVERTISED PLAN




Acoustics • EMF • Structural Dynamics • Vibration

## Friday - 18 April

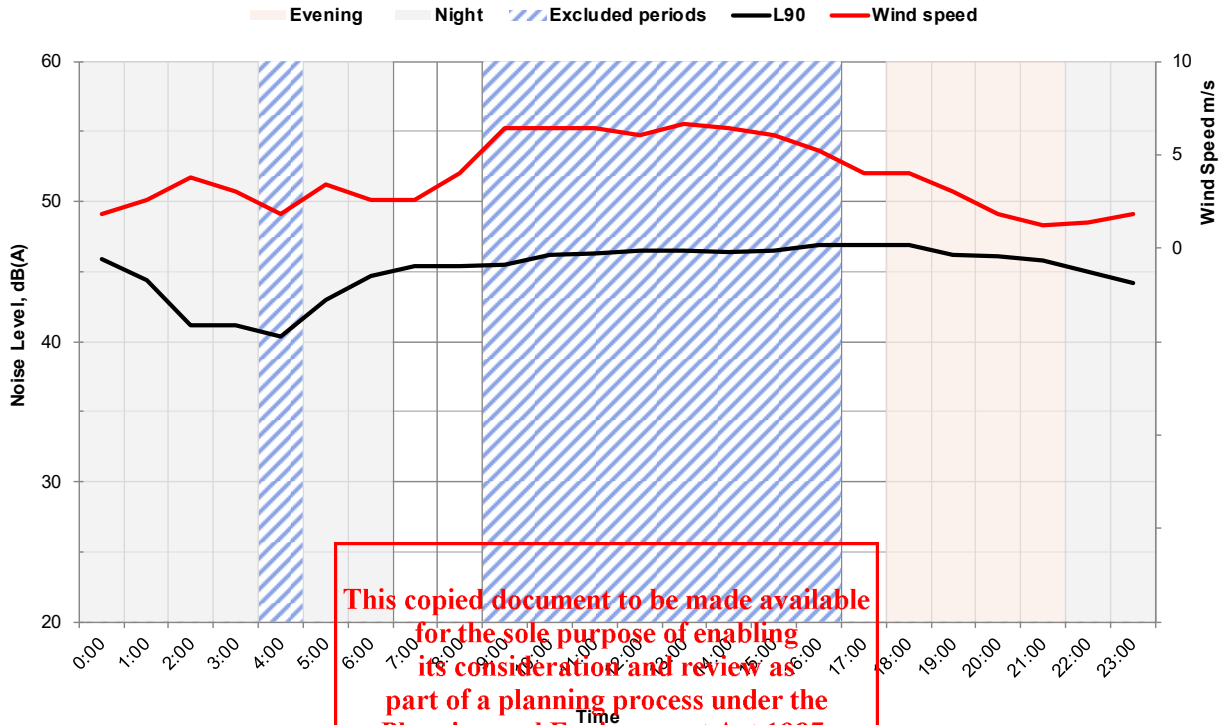

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

## Saturday - 19 April

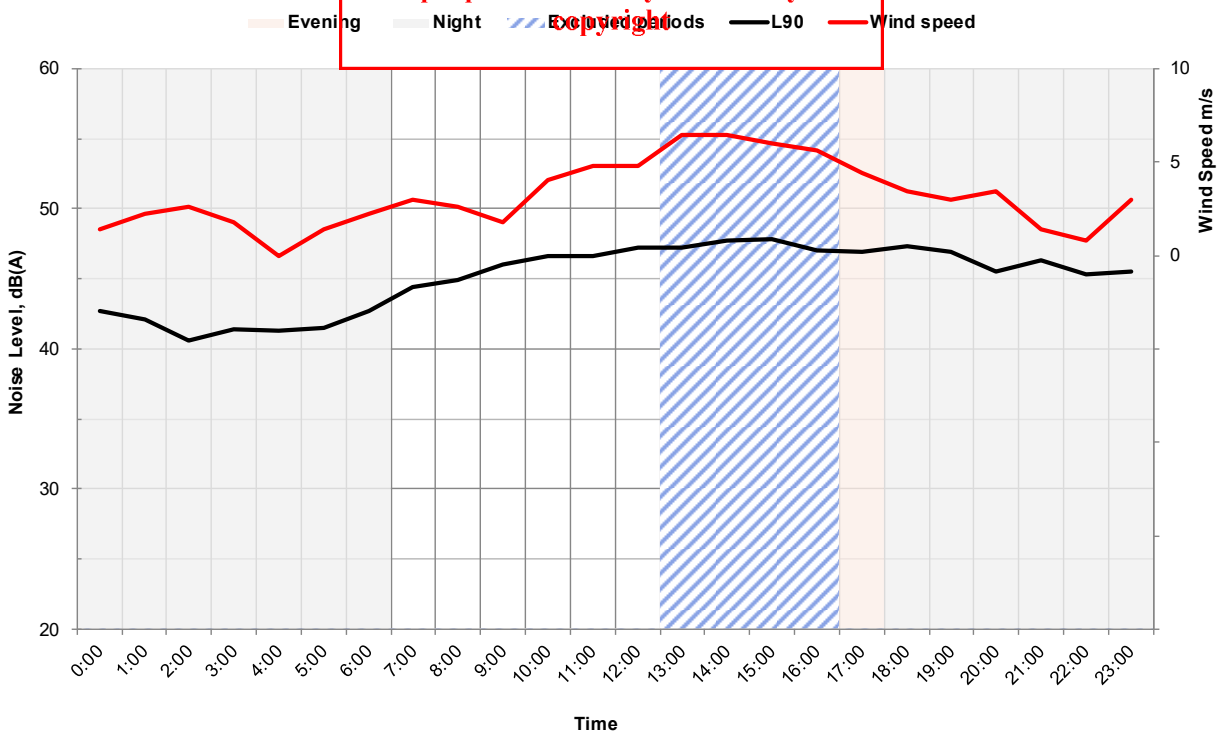


# ADVERTISED PLAN




Acoustics • EMF • Structural Dynamics • Vibration

## Sunday - 20 April

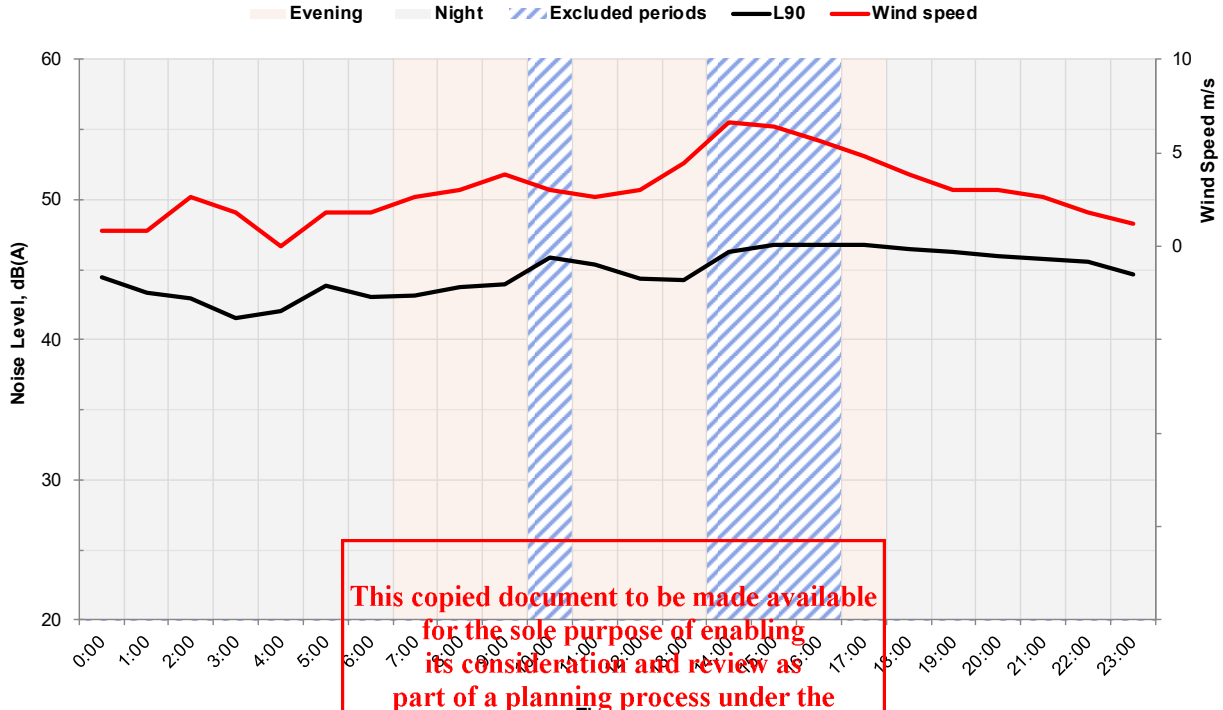

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

## Monday - 21 April


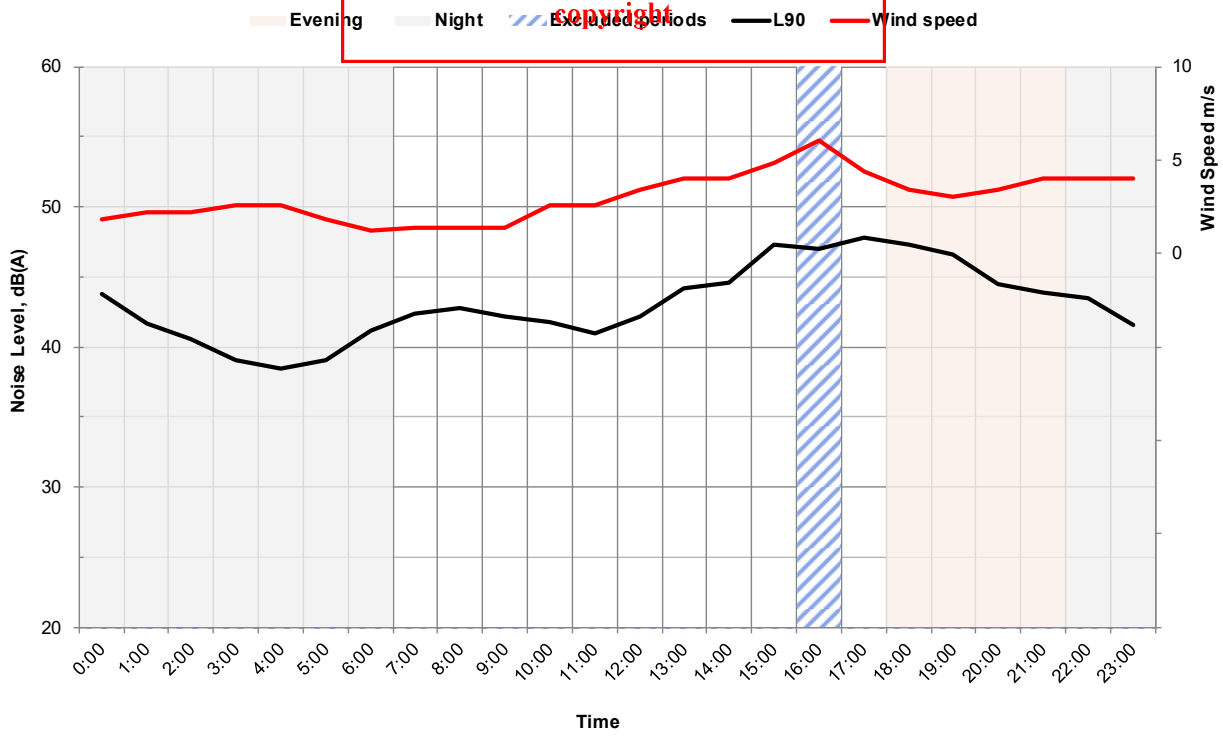



# ADVERTISED PLAN



Acoustics • EMF • Structural Dynamics • Vibration

## Tuesday - 22 April

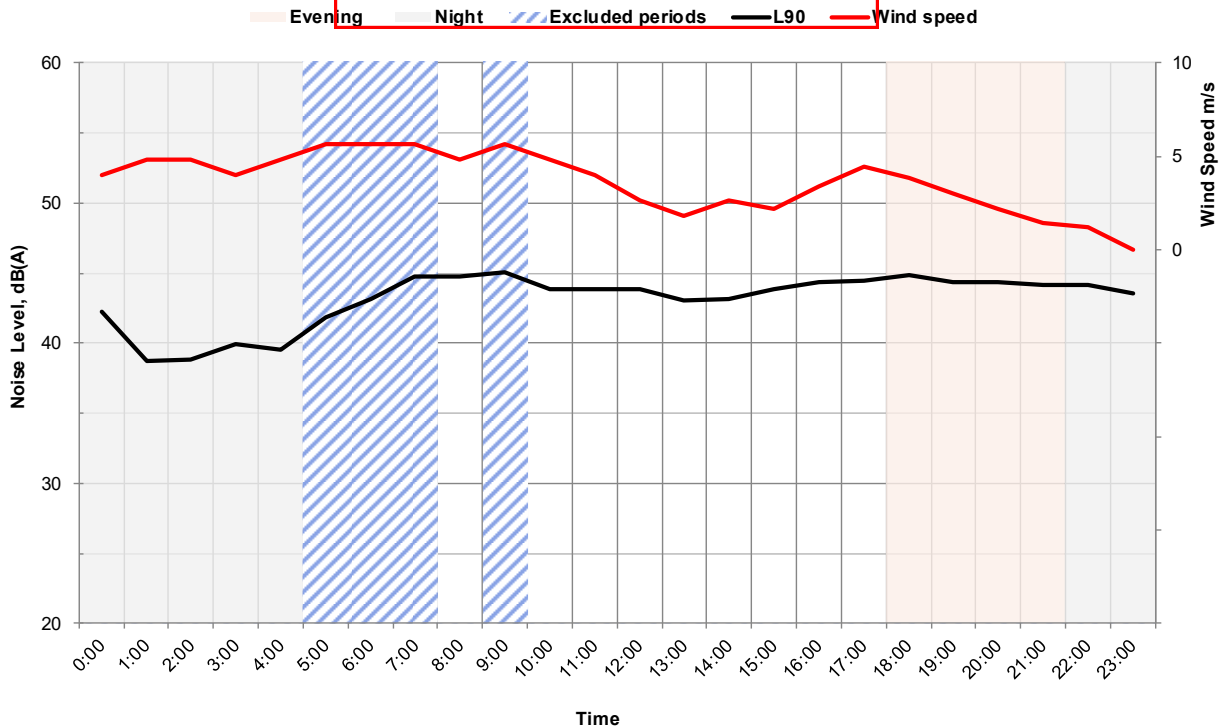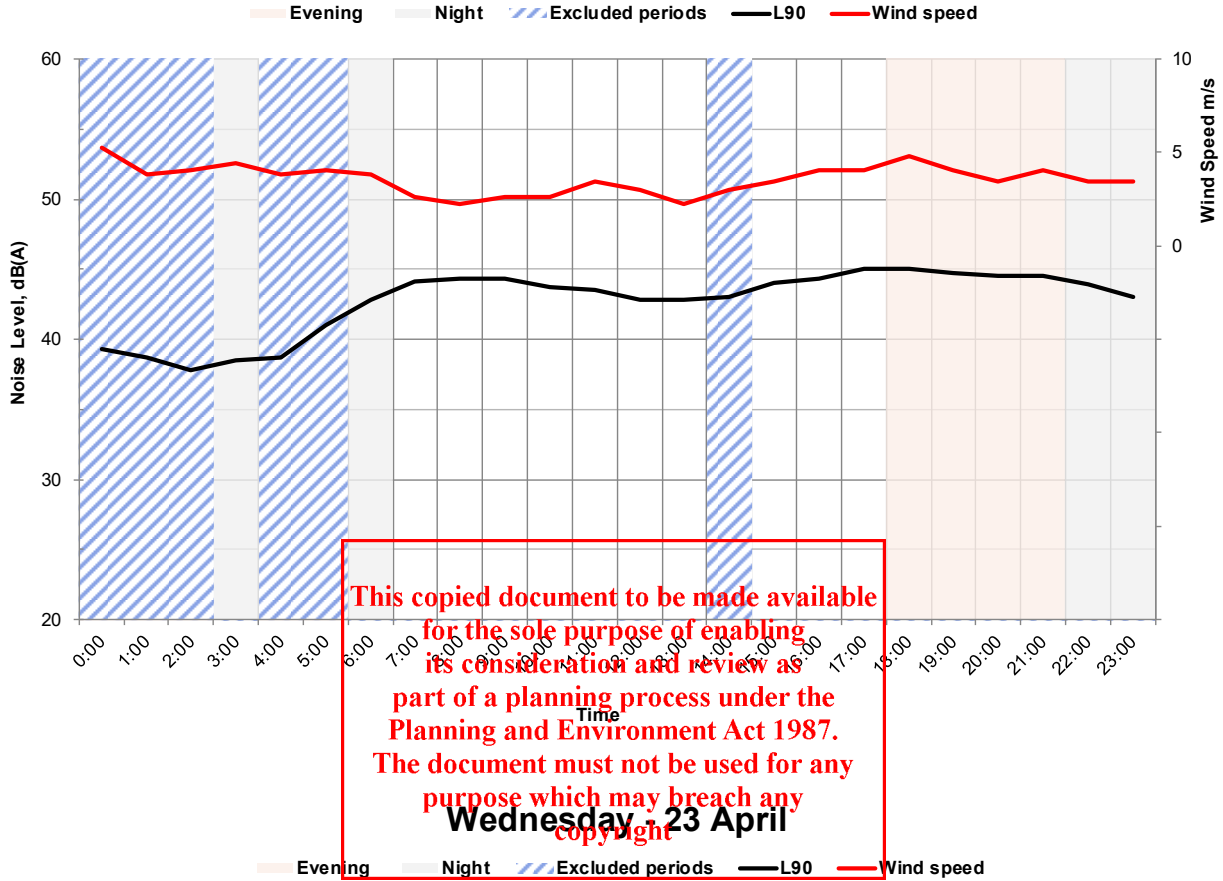

Springvale Energy Hub Location B	
Photograph of noise monitor	
	
Details	
Noise logging dates	16/04/2025 – 23/04/2025
Equipment type and serial number	Rion NL-42 SN00946979
Calibration details	Laboratory calibration valid until August 2026. Field check passed at 94 dB post-logging.

**ADVERTISED  
PLAN**


**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

# ADVERTISED PLAN




Acoustics • EMF • Structural Dynamics • Vibration

## Wednesday - 16 April

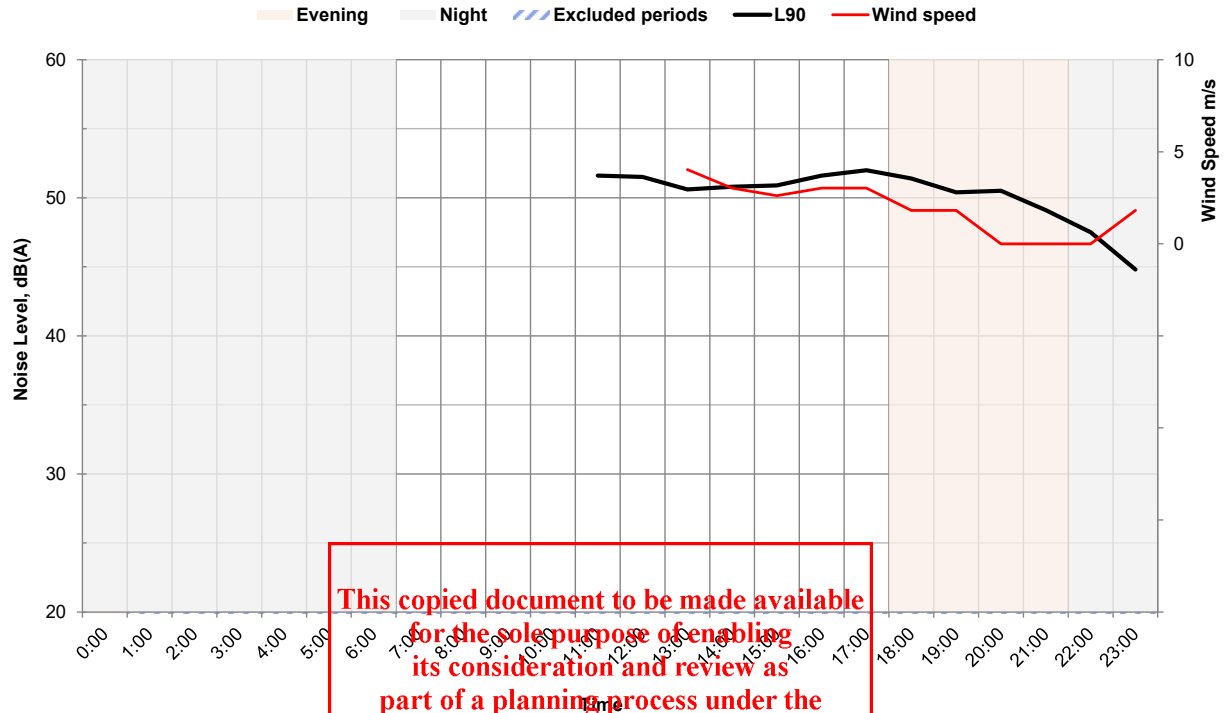

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

**Thursday 17 April**


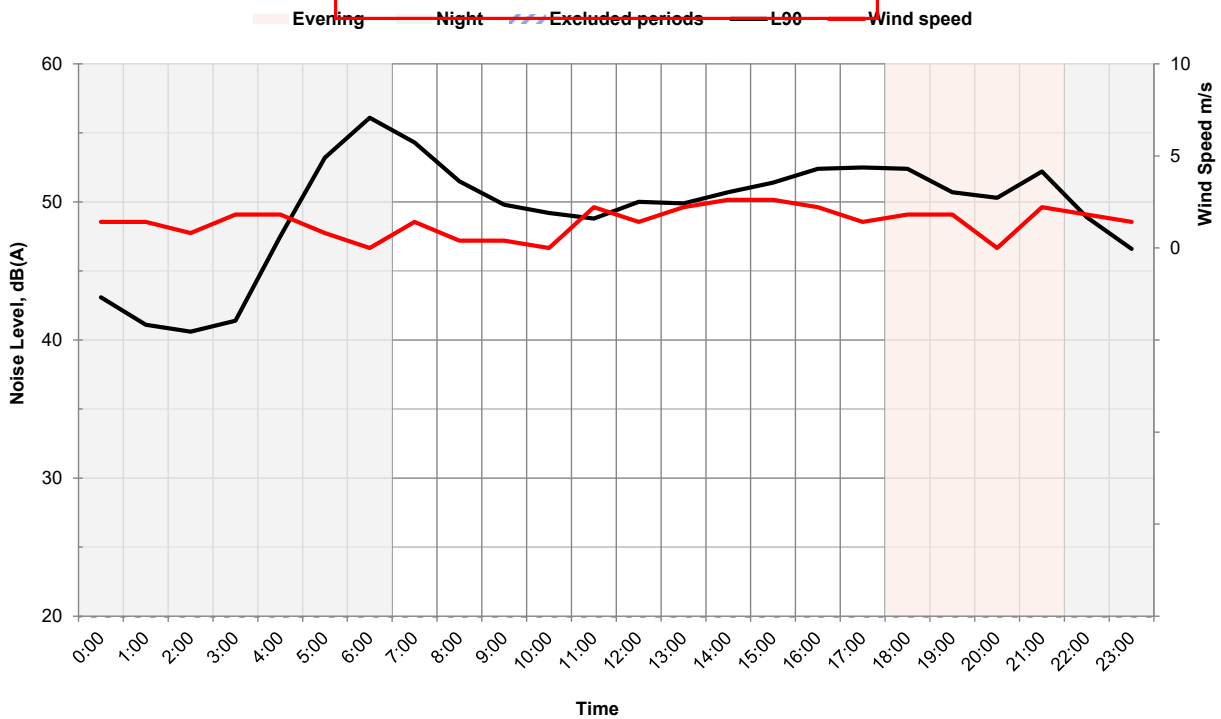


# ADVERTISED PLAN



Acoustics • EMF • Structural Dynamics • Vibration

## Friday - 18 April

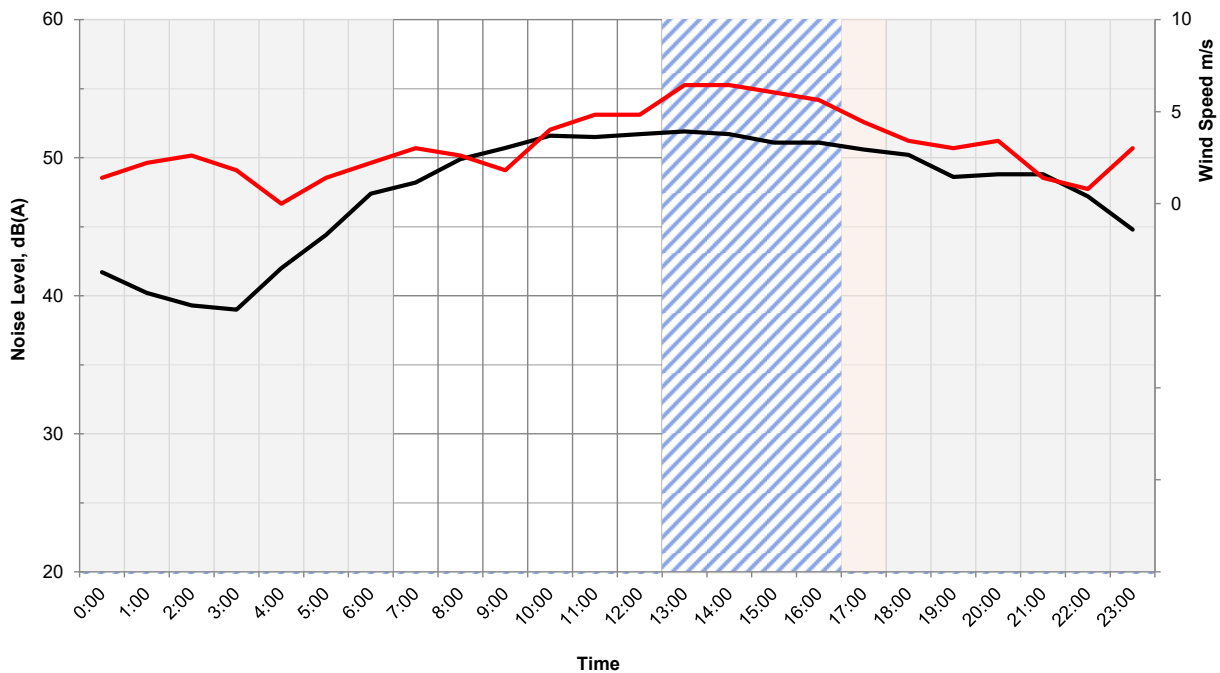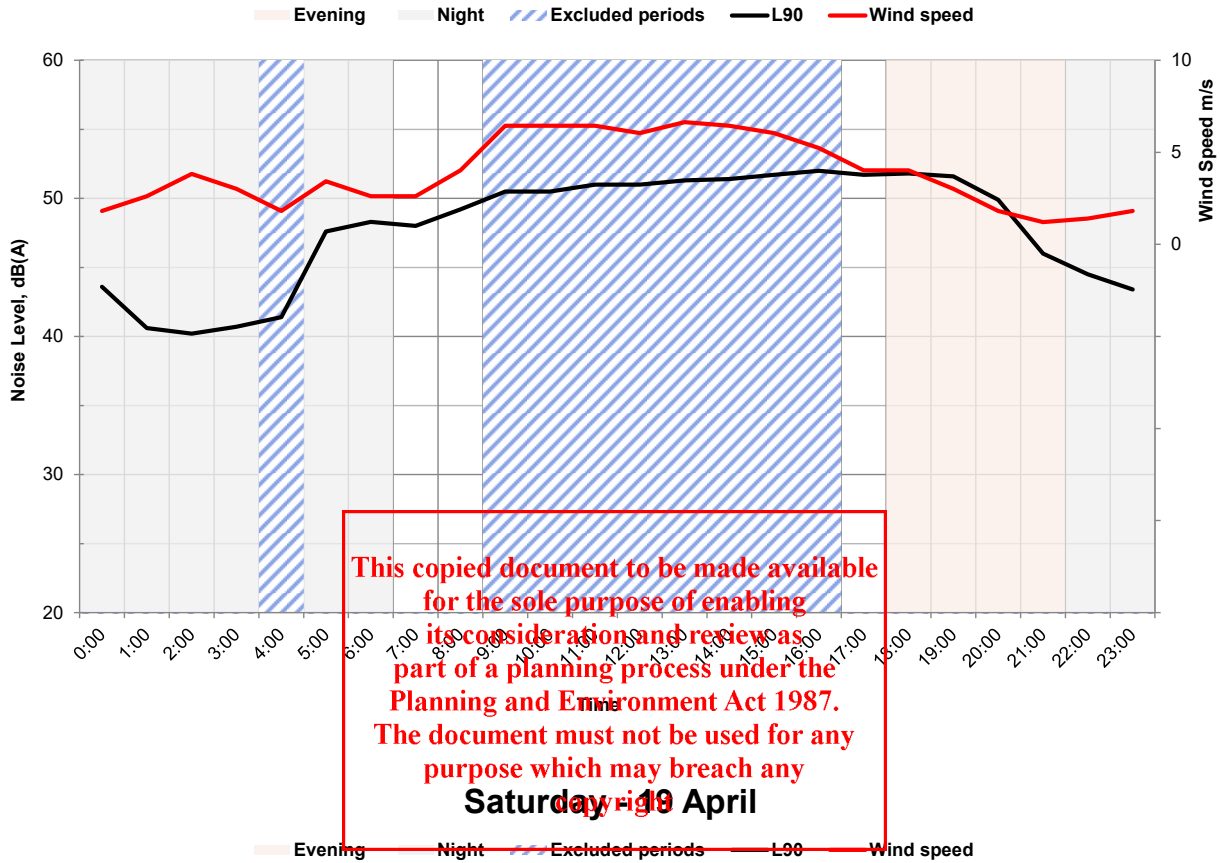


# ADVERTISED PLAN




Acoustics • EMF • Structural Dynamics • Vibration

## Sunday - 20 April

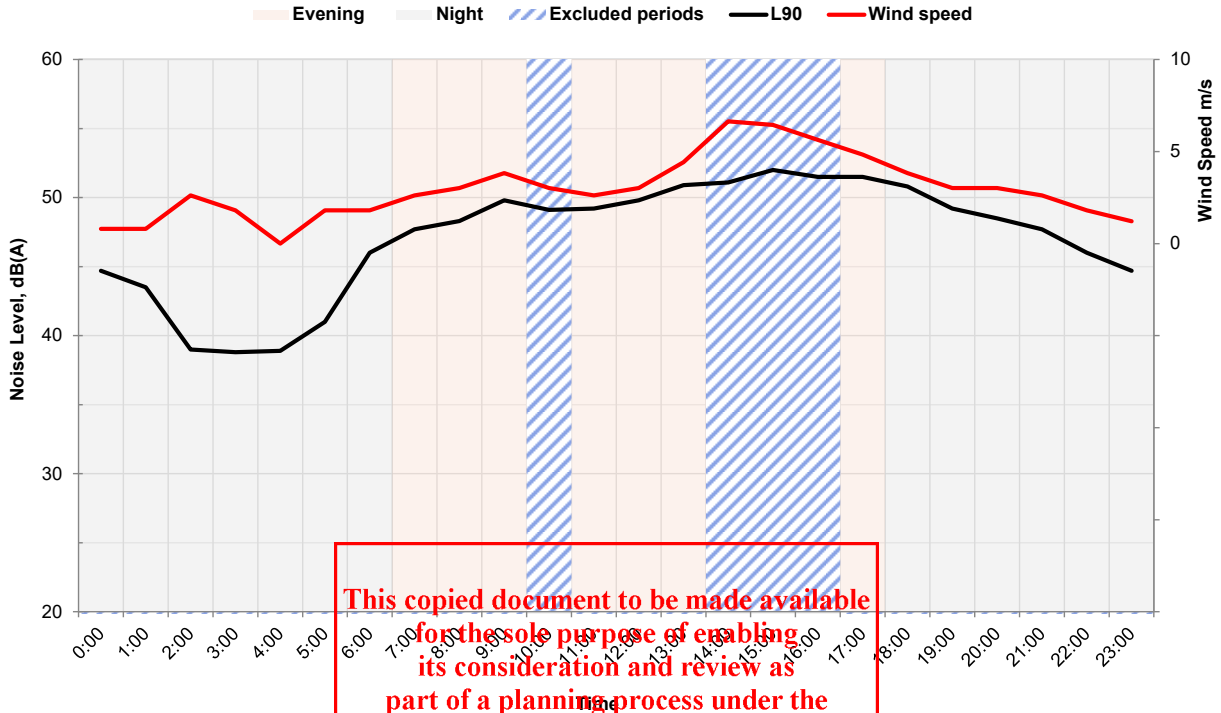

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

## Monday - 21 April

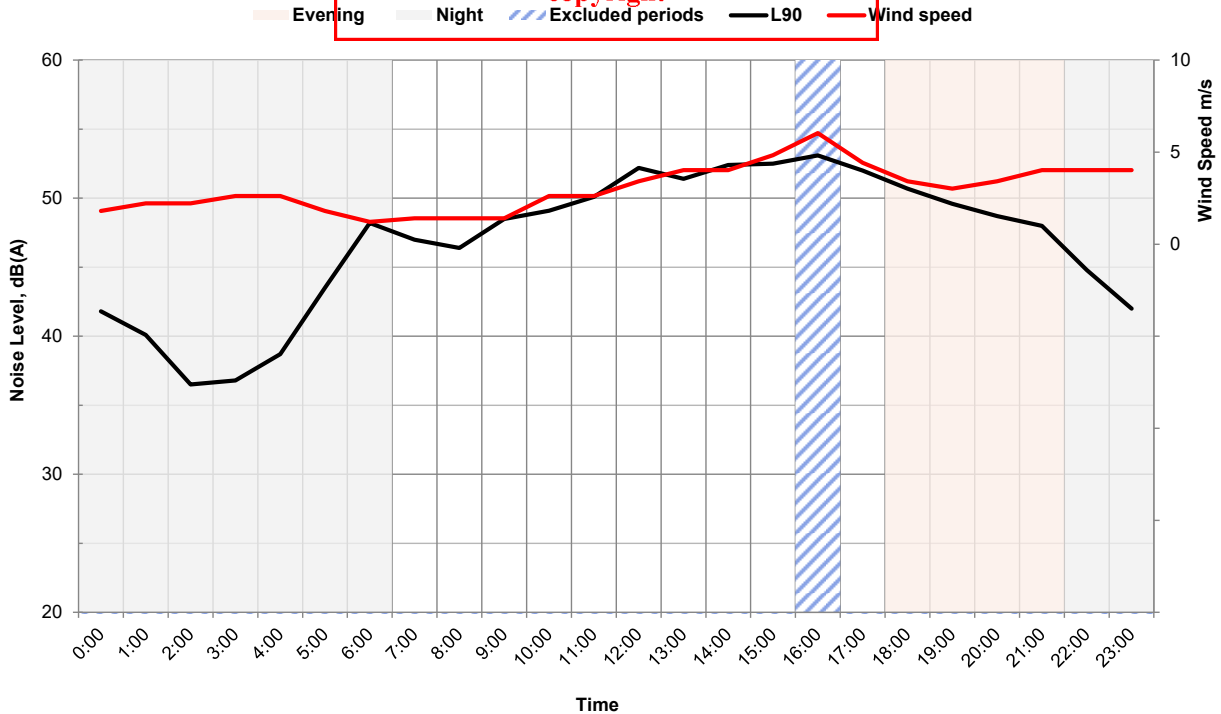


# ADVERTISED PLAN



Acoustics • EMF • Structural Dynamics • Vibration

## Tuesday - 22 April

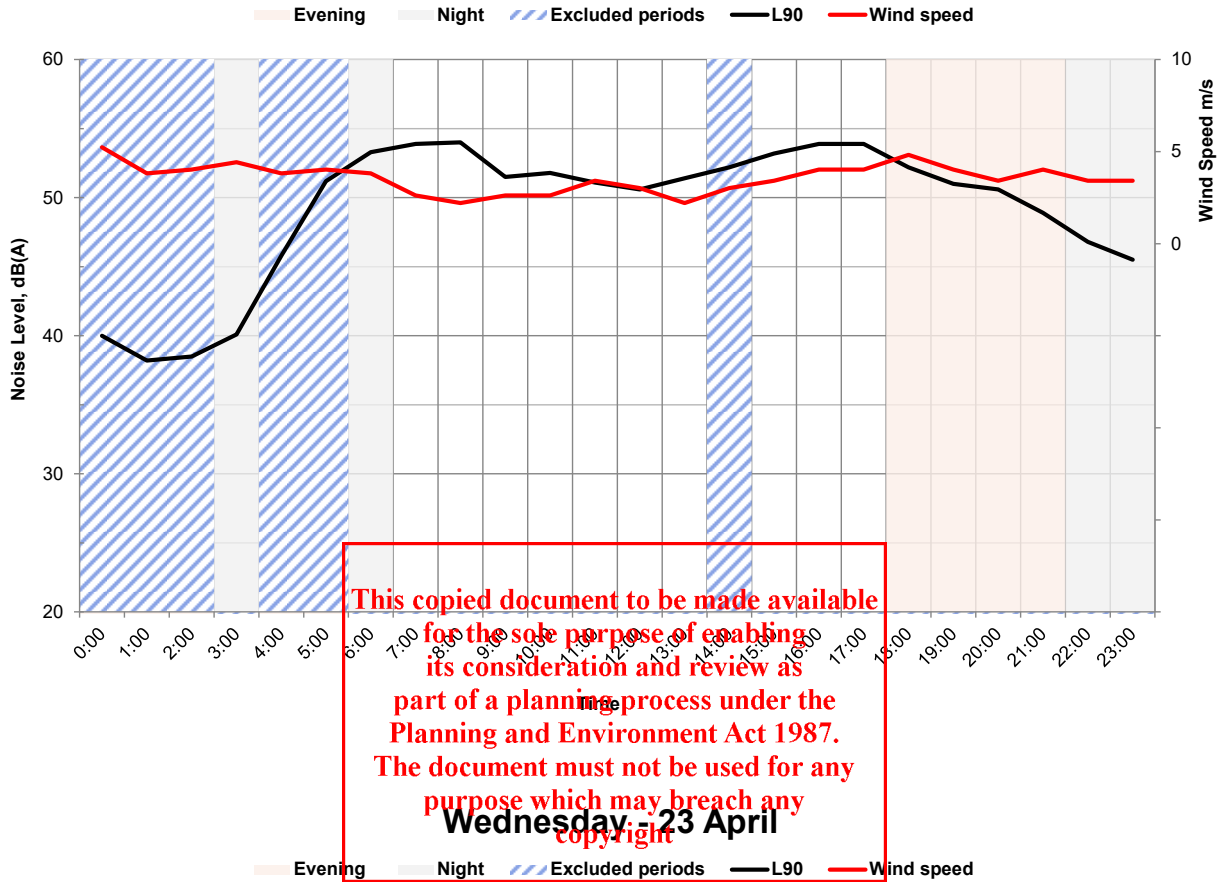

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

## Wednesday - 23 April

