

Shadow Flicker Assessment

Wimmera Plains Energy Facility

Name of project: Wimmera Plains Energy Facility

Project-ID: WN-AU-WIMM-20190923

**ADVERTISED
PLAN**

Author: Elisabete Belaunde Palenzuela

Document version: A

Last Update: 16-Apr-24

Document status: Final

Document classification: Internal

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Copyright and Legal Disclaimer

The content of this report (including text, graphics, photos, tables, & logos, etc.) and any presentation from it, are protected by copyright. They were created by BayWa r.e. AG or members of its group (BayWa re), as independent works. Any dissemination of the report or its parts is only permitted with written permission from BayWa re, or an authorized group company. Without written permission, no part of this report can be passed on, modified, published, translated or reproduced, by anyone, including electronic copying. This reservation also extends to inclusion in or evaluation by databases. Infringements will be prosecuted.

The calculations, views and data presented in this report are current at the date of the report, and BayWa re is under no obligation to update any aspects of the report. Unless BayWa re has given an express warranty of reliance, no person, company or organization is permitted to rely on this report. To the extent that permitted by law, BayWa re accepts no liability for contents of this report.

Classification	Description
Public	Business data that is specifically prepared and approved for public consumption.
Internal	Business data that is not intended for public consumption. However, this can be shared with external partners if required.
Confidential	Sensitive business data that could cause damage to the business if shared with unauthorized persons.
Strictly Confidential	Very sensitive business data that would cause substantial damage to the business if shared with unauthorized people.

**ADVERTISED
PLAN**

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright

Document history

Change history (Change Log)

Revi- sion	Date	Short Description of changes	Author	Review	Approve
A	16-Apr-2024	1 st Issue for review	E. Belaunde	S Dai	R. Gledhill

Relevant documents

Refer to the Appendices for additional supporting information and

Further information can be found in the following documents:

Name of document	Date	Description
SHADOW_Shadow Flicker 52WTG Generic RD180m (max distance 265xMax blade cord 4.32=1145m)	11-Apr-24	windPRO Report
Wimmera Plains Energy Facility Shadow Flicker Assessment	July 2020	Internal Report

ADVERTISED
PLAN

Table of contents

COPYRIGHT AND LEGAL DISCLAIMER	2
DOCUMENT HISTORY	3
CHANGE HISTORY (CHANGE LOG)	3
RELEVANT DOCUMENTS	3
TABLE OF CONTENTS	4
1 INTRODUCTION	5
2 METHODOLOGY	5
3 RESULTS	7
4 COMPARISON WITH PREVIOUS REPORT	8
5 CONCLUSIONS	9
APPENDICES	10
A1 WINDPRO REPORT	11
A2 WIMMERA PLAINS ENERGY FACILITY SHADOW FLICKER ASSESSMENT JULY 2020	17

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

**ADVERTISED
PLAN**

1 Introduction

The Victorian *Planning Guidelines for Development of Wind Energy Facilities*¹ defines Shadow flicker as the resulting effect from the sun's position in relation to the wind turbine blades as they rotate. The rotating blades of wind turbines can cast intermittent shadows that appear to flicker for an observer at a fixed ground position. This occurs under certain combinations of geographical position and time of day.

Shadow flicker can be modelled prior to the finalisation of a wind turbine layout using specialized modelling software.

BayWa r.e. Projects Australia Pty Ltd has undertaken an updated shadow flicker assessment for Wimmera Plains Energy Facility Project. This report documents the methodology and findings of that assessment.

A comparison of results with the previous shadow flicker assessment prepared by BayWa r.e. Projects Australia Pty Ltd in July 2020 is also presented in this report.

2 Methodology

The Victorian *Planning Guidelines for Development of Wind Energy Facilities* states:

“The shadow flicker experienced immediately surrounding the area of a dwelling (garden-fenced area) must not exceed 30 hours per year as a result of the operation of the wind energy facility.”

The Victorian Planning Guidelines do not specify a method of assessment. Therefore, BayWa has followed the guidance and recommendations given in the *Draft National Wind Farm Development Guidelines (2010)*² that provides a good-practice approach to the wind farm shadow flicker assessment.

The Shadow Flicker Assessment at the Wimmera Plains Energy Facility site has been carried out using the windPRO 4.0 modelling software, with the following inputs:

¹[Planning Guidelines for Development of Wind Energy Facilities -VIC 2023](#)

²[Draft National Wind Farm Development Guidelines – 2 July 2010](#)

ADVERTISED PLAN

- The Project layout consisting of 52 wind turbines, the turbines locations are listed in Appendix A.1
- Wind turbine model with 180m rotor diameter and 157m hub height (a.g.l), and assumed maximum blade chord length of 4.32m
- Shadow-receptor locations: A total of 34 existing dwelling locations ('shadow receptors') identified within 3 km of the wind turbines, comprising 13 participant landowners and 21 non-participant landowners, listed in Appendix A.1.

The assessment has been undertaken as per the methodology recommended on the Draft National Guidelines on the basis of the worst-case scenario with modelling parameters and settings detailed below:

Table 1 Summary Shadow-Flicker Modelling Parameters

Model parameter	Setting required by the Draft National Guideline	Model Value
Max. distance/Zone of Influence	265 x Maximum blade chord	265 x 4.32 = 1,145m
Minimum angle to the Sun	3 degrees	3 degrees
Shape of the Sun	Disk	Disk
Orientation of the rotor	Sphere or disk facing the Sun	Sphere
Receptor Height (a.g.l)	1.5 m – 2 m and window / balcony height where dwellings have more than one storey	1.5m ("greenhouse mode" influenced in all directions)
Day/Time step for shadow flicker calculations at receptors	10 min or less	1 day & 1 min
Temporal & Spatial resolution for shadow flicker map	Not more than 25m	7 days & 3 min / 20m
Effects of Topography	Include	Not considered (flat terrain)
Model assumptions for the "worst-case" calculated times of shadow flicker:		
<ul style="list-style-type: none"> ➤ The turbine rotor plane is always perpendicular to the direction of the line of sight from the location of interest to the sun. ➤ The sun is shining all day, from sunrise to sunset, every day of the year. ➤ The wind turbines are always rotating (operating) 		

3 Results

A summary of the results of the “worst-case” scenario shadow flicker assessment for the 52 wind turbines layout of Wimmera Plains Energy Facility following the recommendations and methodology of the Draft National Wind Farm Development Guidelines is presented in the table below.

Table 2 Summary Shadow-Flicker Assessment Results

Modelled Shadow Flicker (hours/year)	Involved Landowner	Non-Involved Landowner	TOTAL
<30	2	0	2
≥30	1	0	1
Total	3	0	3

The table above shows that only one receptor is above the limit of 30 hours of shadow flicker per year. This receptor (ID#4*) is a participant landowner in the project and therefore an agreement waiving the requirement could be implemented, in accordance with the shadow flicker guidelines.

Furthermore, the results in terms of modelled maximum hours of shadow flicker per year for “worst-case” scenario are shown in the form of a shadow flicker map that can be found in the Appendix A.1

Full results can be found on the windPRO report included as an appendix to the present report.

ADVERTISED
PLAN

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright

4 Comparison with previous report

A previous shadow flicker assessment was prepared by BayWa r.e. Projects Australia Pty Ltd in July 2020, the summary of the model and results is presented here below:

- The same 52 WTG layout and shadow flicker receptors were considered
- The same worst case modelling parameters suggested by the National Guidelines which were used in the assessment
- Wind turbine model with 162m rotor diameter and 166m hub height (a.g.l), and maximum blade chord length of 4.32m was considered
- Results: All non-participant landowners were below the 30 hours of shadow flicker per year limit. 1 participant landowner was above the 30 hours of shadow flicker per year and this landowner had entered into an agreement waiving the requirement. For this reason, the project was deemed to be compliant with the Guidelines and Planning Provisions.

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

5 Conclusions

A shadow flicker assessment based on “worst-case” conditions caused by the 52 wind turbines of the Wimmera Plains Energy Facility has been undertaken following the recommendations of the Guidelines.

A total of 34 dwellings (shadow receptors) were identified within 3 km of the wind turbines, comprising 13 participant landowners and 21 non-participant landowners.

All non-participant landowners are below the 30 hours of shadow flicker per year limit and therefore no additional investigation is deemed necessary.

Only one participant landowner is above the limit of 30 hours of shadow flicker per year and therefore an agreement waiving the requirement could be implemented, in accordance with the shadow flicker guidelines.

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Appendices

A1	WINDPRO REPORT	11
----	----------------------	----

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

A1 windPRO Report

Involvement key: (*) Involved Landowner

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

ADVERTISED PLAN

Project: Wimmera Wind Farm	Description: Shadow Flicker Map created for the layout 52WTGs considering generic WTG type with rotor diameter 180m and hub height 157m. Max. WTG blade chord length considered is 4.5m. Worst case assumes sun always shining (from sun rise to sun set), turbine always running and rotor oriented perpendicular to neighbour. Victorian Planning Guidelines: Max. 30 hours/year SF at the receptors.	Licensed user: BayWa r.e. Projects Australia Pty Ltd 79-81 Coppin St c AU-3121 Richmond VIC +61 3 9429 5629 Elisabete Belaunde / elisabete.belaunde@baywa-re.com Calculated: 4/11/2024 11:37 AM/4.0.540	 BayWa r.e.
---	---	--	---

SHADOW - Main Result

Calculation: Shadow Flicker 52WTG Generic RD180m (max distance 265xMax blade cord 4.32=1145m)

Assumptions for shadow calculations

Maximum distance for influence	1,145 m
Minimum sun height over horizon for influence	3 °
Day step for calculation	1 days
Time step for calculation	1 minutes

The calculated times are "worst case" given by the following assumptions:

- The sun is shining all the day, from sunrise to sunset
- The rotor plane is always perpendicular to the line from the WTG to the sun
- The WTG is always operating

Line-of-sight calculation has been deactivated. This means that sheltering from obstacles, areas or hills are not taken into account.

All coordinates are in
UTM (south)-WGS84 Zone: 54

WTGs

	Easting	Southing	Z	Row data/Description	WTG type			Power, rated [kW]	Rotor diameter [m]	Hub height [m]	Shadow data	
					Valid	Manufact.	Type-generator				Calculation distance [m]	RPM
			[m]									
01	619,688	5,950,302	137.8	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
02	619,038	5,950,302	137.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
03	618,466	5,950,616	138.9	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
04	617,696	5,950,763	139.1	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
05	617,200	5,950,371	140.7	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
06	616,467	5,950,635	144.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
07	615,777	5,950,339	143.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
08	615,957	5,951,427	142.1	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
09	616,748	5,951,442	140.9	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
10	617,536	5,951,419	139.7	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
11	618,309	5,951,457	138.1	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
12	619,157	5,951,224	137.2	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
13	619,810	5,950,981	138.4	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
14	619,974	5,951,652	137.6	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
15	620,230	5,952,297	136.9	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
16	619,337	5,952,057	137.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
17	618,376	5,952,252	137.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
18	617,543	5,952,192	140.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
19	616,733	5,952,185	141.1	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
20	615,893	5,952,147	141.7	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
21	616,080	5,952,987	140.7	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
22	616,771	5,952,972	140.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
23	617,626	5,952,957	139.4	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
24	618,379	5,953,147	137.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
25	618,970	5,952,782	136.1	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
26	619,730	5,952,674	135.9	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
27	617,761	5,954,323	138.2	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
28	616,853	5,954,390	139.4	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
29	617,333	5,954,683	138.8	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
30	618,404	5,955,757	136.3	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
31	617,538	5,955,364	138.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
32	616,852	5,955,834	141.3	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
33	616,593	5,956,437	139.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
34	616,159	5,954,401	139.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
35	614,455	5,954,338	138.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
36	614,782	5,953,760	140.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
37	615,434	5,953,704	140.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
38	616,088	5,953,738	141.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
39	615,412	5,953,002	139.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
40	614,737	5,953,017	140.6	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
41	615,031	5,952,219	143.0	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
42	614,090	5,952,296	140.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
43	613,368	5,952,328	139.5	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
44	613,423	5,951,573	139.6	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8
47	611,458	5,950,302	136.4	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	157.0	1,145	10.8

To be continued on next page...

windPRO 4.0.540 by EMD International A/S. Tel. +45 69 16 48 50, www.emd-international.com, support@emd.dk

4/11/2024 12:02 PM / 1



Project: Wimmera Wind Farm	Description: Shadow Flicker Map created for the layout 52WTGs considering generic WTG type with rotor diameter 180m and hub height 157m. Max. WTG blade chord length considered is 4.5m. Worst case assumes sun always shining (from sun rise to sun set), turbine always running and rotor oriented perpendicular to neighbour. Victorian Planning Guidelines: Max. 30 hours/year SF at the receptors.	Licensed user: BayWa r.e. Projects Australia Pty Ltd 79-81 Coppin St c AU-3121 Richmond VIC +61 3 9429 5629 Elisabete Belaunde / elisabete.belaunde@baywa-re.com Calculated: 4/11/2024 11:37 AM/4.0.540	 BayWa r.e.
--------------------------------------	---	---	--

SHADOW - Main Result

Calculation: Shadow Flicker 52WTG Generic RD180m (max distance 265xMax blade cord 4.32=1145m)

...continued from previous page

				WTG type		Power, rated [kW]	Rotor diameter [m]	Hub height [m]	Shadow data	
Easting	Southing	Z	Row data/Description	Valid	Manufact.	Type-generator			Calculation distance [m]	RPM
		[m]								[RPM]
48	610,749	5,950,278	133.9 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8
49	610,429	5,949,663	134.0 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8
50	611,671	5,949,664	137.4 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8
51	611,126	5,949,257	135.2 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8
52	610,273	5,948,818	134.0 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8
53	609,512	5,948,566	134.0 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8
54	612,628	5,949,604	141.5 Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 24...	Yes	Generic	180-5,000	5,000	180.0	1,145	10.8

Shadow receptor-Input

No.	Easting	Southing	Z	Width	Height	Elevation a.g.l.	Slope of window	Direction mode
			[m]	[m]	[m]	[m]	[°]	
1*	614,683	5,950,101	145.3	1.0	1.5	0.0	90.0	"Green house mode"
10*	621,813	5,951,460	143.5	1.0	1.5	0.0	90.0	"Green house mode"
11	621,535	5,953,066	139.5	1.0	1.5	0.0	90.0	"Green house mode"
12	620,948	5,953,943	135.5	1.0	1.5	0.0	90.0	"Green house mode"
14	619,632	5,954,743	135.7	1.0	1.5	0.0	90.0	"Green house mode"
15	621,335	5,955,324	136.7	1.0	1.5	0.0	90.0	"Green house mode"
16	620,955	5,955,524	136.0	1.0	1.5	0.0	90.0	"Green house mode"
17	620,310	5,956,485	135.2	1.0	1.5	0.0	90.0	"Green house mode"
18*	617,633	5,956,569	141.3	1.0	1.5	0.0	90.0	"Green house mode"
19	615,046	5,955,633	139.7	1.0	1.5	0.0	90.0	"Green house mode"
2	619,626	5,954,517	136.2	1.0	1.5	0.0	90.0	"Green house mode"
22*	611,823	5,947,355	140.3	1.0	1.5	0.0	90.0	"Green house mode"
3*	613,143	5,953,314	144.4	1.0	1.5	0.0	90.0	"Green house mode"
36*	611,600	5,954,903	137.5	1.0	1.5	0.0	90.0	"Green house mode"
38	615,424	5,957,939	140.2	1.0	1.5	0.0	90.0	"Green house mode"
39	617,297	5,957,730	138.0	1.0	1.5	0.0	90.0	"Green house mode"
4*	614,867	5,951,583	143.0	1.0	1.5	0.0	90.0	"Green house mode"
40	616,448	5,958,725	139.5	1.0	1.5	0.0	90.0	"Green house mode"
42	620,421	5,957,478	134.5	1.0	1.5	0.0	90.0	"Green house mode"
5	614,762	5,950,924	142.5	1.0	1.5	0.0	90.0	"Green house mode"
58*	621,646	5,951,665	140.9	1.0	1.5	0.0	90.0	"Green house mode"
6*	613,536	5,948,867	143.3	1.0	1.5	0.0	90.0	"Green house mode"
60*	608,041	5,947,051	135.0	1.0	1.5	0.0	90.0	"Green house mode"
61*	611,026	5,951,627	133.7	1.0	1.5	0.0	90.0	"Green house mode"
62*	610,840	5,952,878	134.0	1.0	1.5	0.0	90.0	"Green house mode"
63*	609,525	5,950,816	132.6	1.0	1.5	0.0	90.0	"Green house mode"
66	608,385	5,951,289	133.9	1.0	1.5	0.0	90.0	"Green house mode"
7	620,832	5,949,409	141.8	1.0	1.5	0.0	90.0	"Green house mode"
71	607,522	5,949,538	131.6	1.0	1.5	0.0	90.0	"Green house mode"
73	608,005	5,949,963	132.6	1.0	1.5	0.0	90.0	"Green house mode"
8	620,871	5,949,576	142.1	1.0	1.5	0.0	90.0	"Green house mode"
80	607,624	5,946,412	134.5	1.0	1.5	0.0	90.0	"Green house mode"
84	607,509	5,948,109	133.0	1.0	1.5	0.0	90.0	"Green house mode"
9	621,445	5,950,021	144.4	1.0	1.5	0.0	90.0	"Green house mode"

Calculation Results

Shadow receptor

Shadow, worst case

No.	Shadow hours per year [h/year]	Shadow days per year [days/year]	Max shadow hours per day [h/day]
1*	23:34	49	0:37
10*	0:00	0	0:00
11	0:00	0	0:00
12	0:00	0	0:00
14	0:00	0	0:00
15	0:00	0	0:00
16	0:00	0	0:00
17	0:00	0	0:00

To be continued on next page...

Project: Wimmera Wind Farm	Description: Shadow Flicker Map created for the layout 52WTGs considering generic WTG type with rotor diameter 180m and hub height 157m. Max. WTG blade chord length considered is 4.5m. Worst case assumes sun always shining (from sun rise to sun set), turbine always running and rotor oriented perpendicular to neighbour. Victorian Planning Guidelines: Max. 30 hours/year SF at the receptors.	Licensed user: BayWa r.e. Projects Australia Pty Ltd 79-81 Coppin St c AU-3121 Richmond VIC +61 3 9429 5629 Elisabete Belaunde / elisabete.belaunde@baywa-re.com Calculated: 4/11/2024 11:37 AM/4.0.540	 BayWa r.e.
--------------------------------------	--	---	--

SHADOW - Main Result

Calculation: Shadow Flicker 52WTG Generic RD180m (max distance 265xMax blade cord 4.32=1145m)

...continued from previous page

No.	Shadow, worst case		Max shadow hours per day
	Shadow hours per year [h/year]	Shadow days per year [days/year]	
18*	29:18	57	0:40
19	0:00	0	0:00
2	0:00	0	0:00
22*	0:00	0	0:00
3*	0:00	0	0:00
36*	0:00	0	0:00
38	0:00	0	0:00
39	0:00	0	0:00
4*	48:09	101	0:38
40	0:00	0	0:00
42	0:00	0	0:00
5	0:00	0	0:00
58*	0:00	0	0:00
6*	0:00	0	0:00
60*	0:00	0	0:00
61*	0:00	0	0:00
62*	0:00	0	0:00
63*	0:00	0	0:00
66	0:00	0	0:00
7	0:00	0	0:00
71	0:00	0	0:00
73	0:00	0	0:00
8	0:00	0	0:00
80	0:00	0	0:00
84	0:00	0	0:00
9	0:00	0	0:00

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright

Total amount of flickering on the shadow receptors caused by each WTG		Worst case [h/year]
No.	Name	
01	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (122)	0:00
02	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (123)	0:00
03	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (124)	0:00
04	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (125)	0:00
05	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (126)	0:00
06	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (127)	0:00
07	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (128)	23:34
08	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (129)	26:04
09	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (130)	0:00
10	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (131)	0:00
11	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (132)	0:00
12	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (133)	0:00
13	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (134)	0:00
14	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (135)	0:00
15	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (136)	0:00
16	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (137)	0:00
17	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (138)	0:00
18	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (139)	0:00
19	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (140)	0:00
20	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (141)	0:00
21	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (142)	0:00
22	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (143)	0:00
23	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (144)	0:00
24	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (145)	0:00
25	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (146)	0:00
26	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (147)	0:00
27	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (148)	0:00
28	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (149)	0:00
29	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (150)	0:00
30	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (151)	0:00
31	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (152)	0:00
32	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (153)	0:00
33	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (154)	29:18

To be continued on next page...

**ADVERTISED
PLAN**

Project: Wimmera Wind Farm	Description: Shadow Flicker Map created for the layout 52WTGs considering generic WTG type with rotor diameter 180m and hub height 157m. Max. WTG blade chord length considered is 4.5m. Worst case assumes sun always shining (from sun rise to sun set), turbine always running and rotor oriented perpendicular to neighbour. Victorian Planning Guidelines: Max. 30 hours/year SF at the receptors.	Licensed user: BayWa r.e. Projects Australia Pty Ltd 79-81 Coppin St c AU-3121 Richmond VIC +61 3 9429 5629 Elisabete Belaunde / elisabete.belaunde@baywa-re.com Calculated: 4/11/2024 11:37 AM/4.0.540	
--------------------------------------	--	---	---

SHADOW - Main Result

Calculation: Shadow Flicker 52WTG Generic RD180m (max distance 265xMax blade cord 4.32=1145m)

...continued from previous page


No.	Name	Worst case [h/year]
34	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (155)	0:00
35	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (156)	0:00
36	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (157)	0:00
37	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (158)	0:00
38	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (159)	0:00
39	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (160)	0:00
40	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (161)	0:00
41	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (162)	0:00
42	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (163)	22:05
43	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (164)	0:00
44	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (165)	0:00
47	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (166)	0:00
48	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (167)	0:00
49	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (168)	0:00
50	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (169)	0:00
51	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (170)	0:00
52	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (171)	0:00
53	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (172)	0:00
54	Generic 180 5000 180.0 !O! hub: 157.0 m (TOT: 247.0 m) (173)	0:00

Total times in Receptor wise and WTG wise tables can differ, as a WTG can lead to flicker at 2 or more receptors simultaneously and/or receptors may receive flicker from 2 or more WTGs simultaneously.

ADVERTISED PLAN


**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

ADVERTISED PLAN

Project: Wimmera Wind Farm	Description: Shadow Flicker Map created for the layout 52WTGs considering generic WTG type with rotor diameter 180m and hub height 157m. Max. WTG blade chord length considered is 4.5m. Worst case assumes sun always shining (from sun rise to sun set), turbine always running and rotor oriented perpendicular to neighbour. Victorian Planning Guidelines: Max. 30 hours/year SF at the receptors.	Licensed user: BayWa r.e. Projects Australia Pty Ltd 79-81 Coppin St c AU-3121 Richmond VIC +61 3 9429 5629 Elisabete Belaunde / elisabete.belaunde@baywa-re.com Calculated: 4/11/2024 11:37 AM/4.0.540	 BayWa r.e.
---	--	--	---

SHADOW - Map

Calculation: Shadow Flicker 52WTG Generic RD180m (max distance 265xMax blade cord 4.32=1145m)

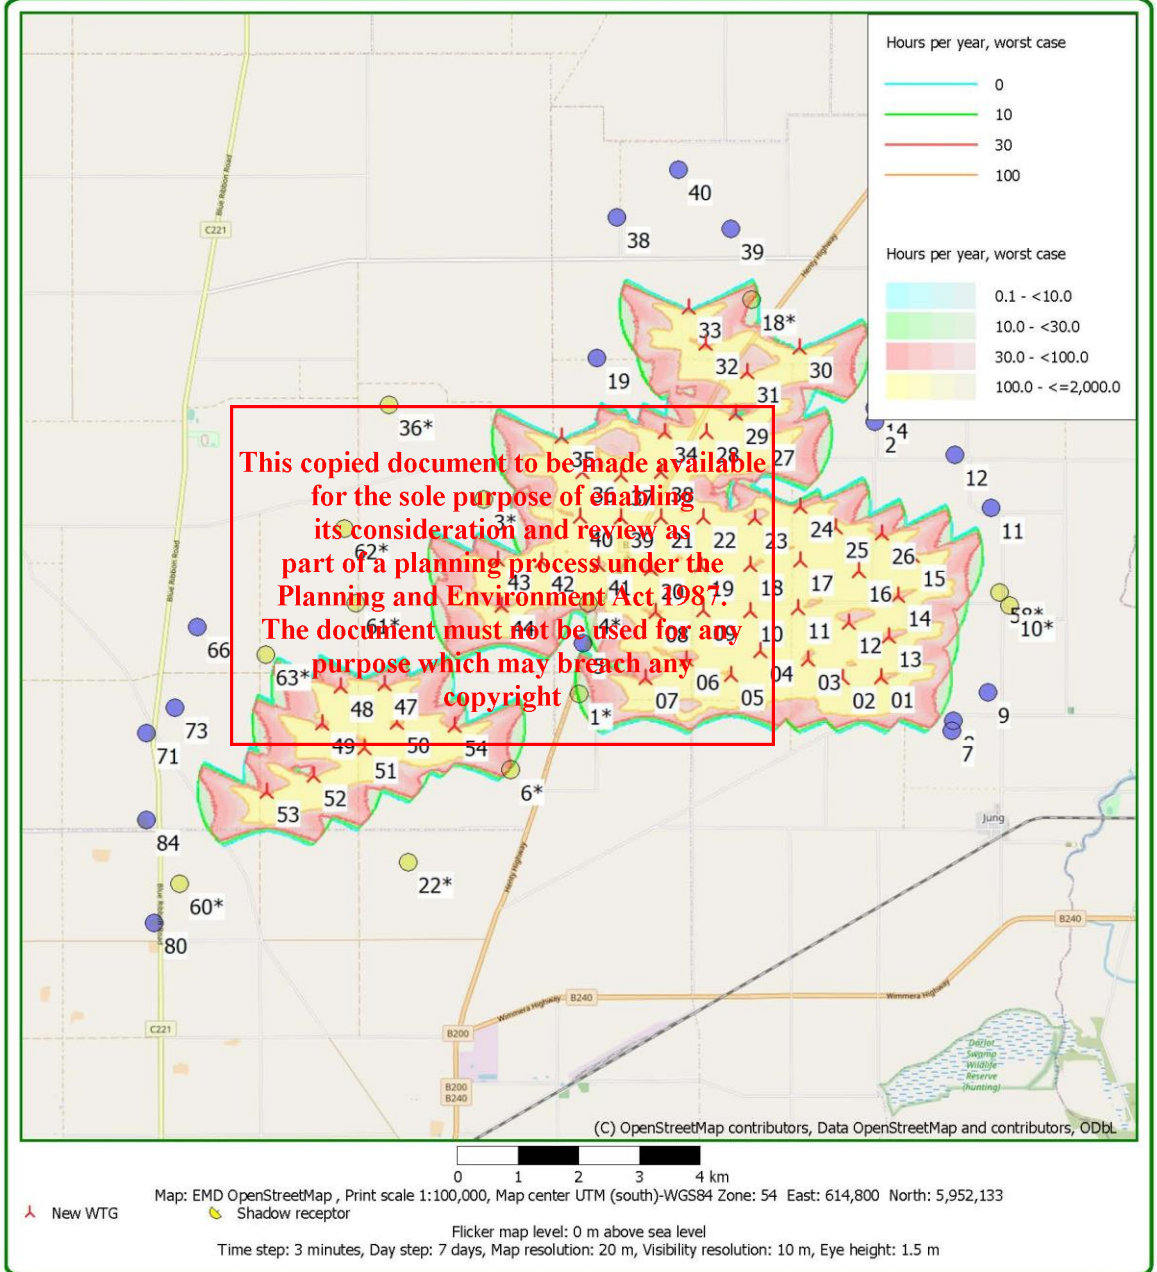

windPRO 4.0.540 by EMD International A/S, Tel. +45 69 16 48 50, www.emd-international.com, support@emd.dk

4/11/2024 12:02 PM / 5

windPRO 

A2 Wimmera Plains Energy Facility Shadow Flicker Assessment July 2020

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Wimmera Plains Energy Facility

Shadow Flicker Assessment

Prepared by:

BayWa r.e. Projects Australia Pty Ltd

July 2020

**ADVERTISED
PLAN**

Revision History

Rev	Reason for Revision	Date	Prepared	Reviewed	Approved
# 1	Planning Permit Application	29/06/20	TB	FC	KJ
# 2	Removal of WTGs 45 and 46	21/07/20	TB	FC	KJ

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Contents

Contents.....	iii
Figures.....	iii
Tables.....	iii
1. Executive Summary.....	1
2. Introduction	2
3. The Project	3
4. Methodology.....	3
5. Shadow Flicker Assessment	4
5.1. Modelling Parameters and Assumptions.....	4
5.2. Modelling Inputs	5
5.2.1. Wind Turbine Generators	5
5.2.2. Receptors	6
5.3. Results.....	8
6. Conclusion.....	10

This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright

Figures

Figure 1. Typical Representation of Shadow Flicker from a Single Turbine	3
Figure 2. Receptors' and Turbines' Locations	7
Figure 3. Modelled Shadow Flicker.....	9

Tables

Table 1. Recommended Exposure Limits	4
Table 2. Shadow Flicker Modelling Parameters.....	4
Table 3. Wind Turbine Specifications.....	5
Table 4. Shadow Flicker Assessment Results.....	8

**ADVERTISED
PLAN**

1. Executive Summary

The Policy and Planning Guidelines - Development of Wind Energy Facilities, DELWP, March 2019 (Victoria Guidelines) specify that *“Shadow flicker results from the position of the sun in relation to the blades of the wind turbine as they rotate.”*

The document also notes that *“Shadow flicker can be modelled in advance and siting and design can mitigate the problem. This is more likely to be an issue for turbines located to the east or west of a dwelling.”*

In terms of acceptable threshold it is stipulated that *“Shadow flicker from the wind energy facility must not exceed 30 hours per annum at any pre-existing dwelling, unless an agreement has been entered into with the relevant landowner waiving this requirement”*

An assessment based on worst case conditions of the shadow flicker caused by the 52 wind turbines of the Wimmera Plains Energy Facility has been undertaken following the recommendations and methodology of the National Wind Farm Development Guidelines – Draft, EPHC, July 2010 (National Guidelines). A total of 34 dwellings (receptors) were identified within 3 km of the wind turbines, comprising 12 participant landowners and 22 non-participant landowners. All non-participant landowners are below the 30 hours of shadow flicker per year limit and therefore no additional investigation is deemed necessary. 1 participant landowner will receive greater than 30 hours of shadow flicker per year and this landowner has entered into an agreement waiving the requirement. For this reason, the project is considered to be compliant with the Guidelines and Planning Provisions.

ADVERTISED PLAN

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

ADVERTISED PLAN

2. Introduction

The present report performs an assessment of the potential shadow flicker as a result of the operation of the Wimmera Plains Energy Facility and has been prepared by BayWa r.e. Projects Australia Pty Ltd in accordance with:

- The Policy and Planning Guidelines - Development of Wind Energy Facilities, DELWP, March 2019 (Victorian Guidelines); and
- The National Wind Farm Development Guidelines – Draft, EPHC, July 2010 (National Guidelines).

According to the Victorian Guidelines:

Shadow flicker results from the position of the sun in relation to the blades of the wind turbine as they rotate. This occurs under certain combinations of geographical position and time of day. The seasonal duration of this effect can be calculated from the geometry of the machine and the latitude of the site.

The Victorian Guidelines also state that:

The shadow flicker experienced immediately surrounding the area of a dwelling (garden fenced area) must not exceed 30 hours per year as a result of the operation of the wind energy facility.

Shadow flicker is defined on the National Guidelines as follows:

Shadow flicker is produced by wind turbine blades blocking the sun for short periods of time (less than 1 second) as the blades rotate, causing a strobing effect. The likelihood of shadow flicker affecting people is dependant on the alignment of the wind turbine and the sun, and their distance from the wind turbine.


The National Guidelines also explain why shadow flicker is an issue:

The main risk associated with shadow flicker is the potential to disturb residents in the immediate vicinity. Investigations undertaken when developing these Guidelines determined that the potential risk for epileptic seizures and distraction of drivers is negligible to people living, visiting or driving near a wind farm.

Shadow flicker is typically represented by a coloured graph as the one presented on Figure 1 below as an example.

ADVERTISED PLAN

Figure 1. Typical Representation of Shadow Flicker from a Single Turbine

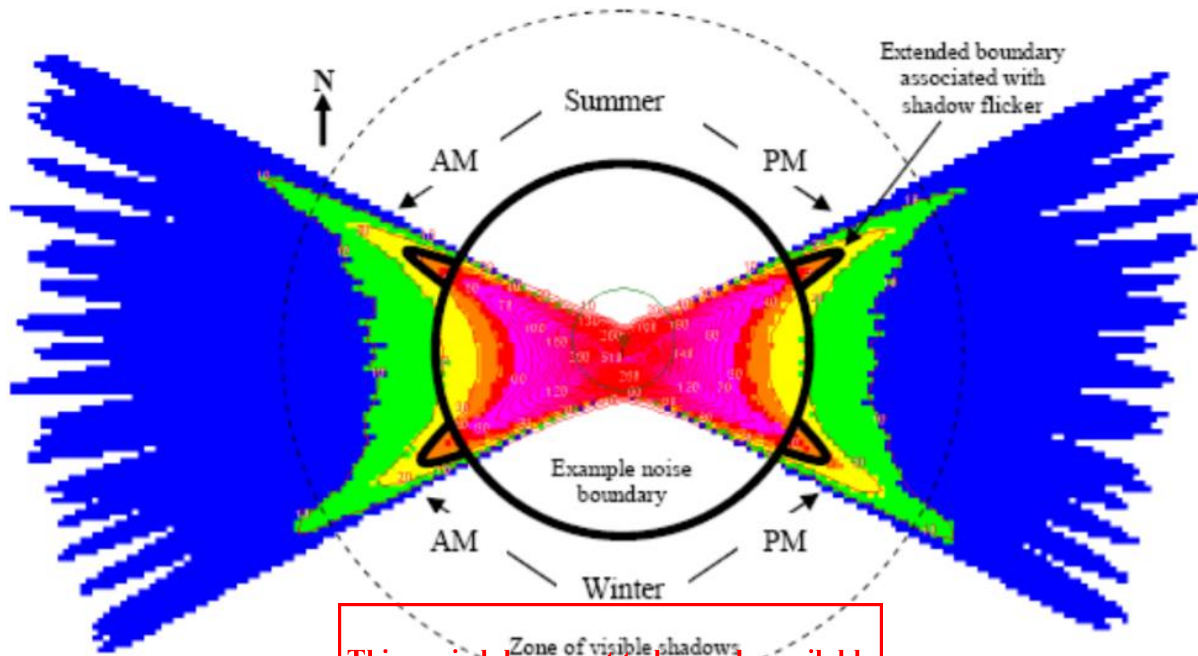

This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright.

The following features are exhibited on the figure:

- The different colour bands represent different annual exposure to shadow flicker (blue 0-10 hr/yr, green 10-20 hr/yr etc);
- The areas (directions) affected at different times of day and year;
- The zone within which shadows are likely to be visible is shown. Intensity decreases with distance and only shadows occurring within a certain distance of a turbine are likely to be visible

3. The Project

The proposed Wimmera Plains Energy Facility consists of 52 wind turbines located approximately between 12 and 22 km northeast of Horsham.

The selected wind turbine model for this project is the Vestas V162 with a hub height of 166 m agl.

4. Methodology

The assessment has been undertaken as per the methodology recommended on the National Guidelines detailed below:

- Determine the extent of shadows from turbines being a distance of 265 x maximum blade chord (no assessment is required for residences beyond this distance). Section E.7.2 of the National Guidelines provides the basis for this limit.
- Identify all residences within the extent of shadows from proposed turbine positions.

ADVERTISED PLAN

- Use modelling software with relevant modelling parameters (further detail in next section) to calculate the theoretical annual shadow flicker duration at each residence, accounting for topography and cumulative effects.
- If necessary, modify turbine layout and repeat calculations, or introduce mitigation measures to achieve compliance with the specified limits in Table 1 below (the limits only apply to non-participating landowners).

Table 1. Recommended Exposure Limits

Assessment Scenario	Acceptable Level (hours/year)
Modelled (through appropriate software based on a worst case scenario)	30
Measured (includes real time meteorological data)	10

The National Guidelines recommend a stepped approach for the Shadow Flicker assessment, starting with a Modelled Assessment followed by a Measured Assessment for receptors where the Modelled Assessment predicted more than 30 h/year of shadow flicker. It is commonly accepted that where a receptor experiences a 'Modelled' level of shadow flicker less than 30 hours per year, no further investigation is required.

It is important to note that the above limits applies to any pre-existing receptor unless an agreement has been entered into with the relevant landowner waiving this requirement.

5. Shadow Flicker Assessment

The present Shadow Flicker Assessment has been carried out using the WindPro modelling software on the basis of the worst case scenario, as discussed above. All relevant parameters, assumptions and inputs adopted in this assessment are discussed below.

5.1. Modelling Parameters and Assumptions

The worst case modelling parameters suggested by the National Guidelines which were used in this assessment are presented below:

Table 2. Shadow Flicker Modelling Parameters

Model Parameter	Setting
Zone of Influence	265 x 4.32 (max blade chord) = 1145 m
Minimum Angle to the Sun	3 deg
Shape of the Sun	Disk
Elevation Resolution	1 m
Receptor Height	1.5 m

The following assumptions have been adopted:

- The rotor plane is always perpendicular to the line from the WTG to the sun;
- The sun is shining all day, from sunrise to sunset; and
- The wind turbine is always operating.

5.2. Modelling Inputs

5.2.1. Wind Turbine Generators

The proposed Wimmera Plains Energy Facility comprises 52 units of the Vestas V162 wind turbine generator. This wind turbine model's specifications relevant for this assessment are presented below. A map showing the turbines' locations can be found further below and GIS coordinates are included in the WindPro report in appendix.

Table 3. Wind Turbine Specifications

Hub Height	166 m
Rotor Diameter	162 m
Top of Rotor (Tip Height)	247 m
Bottom of Rotor	85 m
Maximum Blade Chord	4.32 m

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

5.2.2. Receptors

A total of 34 dwellings have been identified and mapped within 3km of the Wimmera Plains Energy Facility, being 12 stakeholder properties and 22 non-stakeholder properties.

The figure below shows receptors' and turbines' locations. GIS coordinates are included in the WindPro report in appendix.

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Figure 2. Receptors' and Turbines' Locations

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**


Wimmera Plains
Energy Facility

Nearby Dwellings

Legend


 Turbine Location

Dwelling

 Non-stakeholder

 Stakeholder

ADVERTISED
PLAN




Scale at A3:
1:60,000

0 1.5 3 Km



Date: 07/15/2020

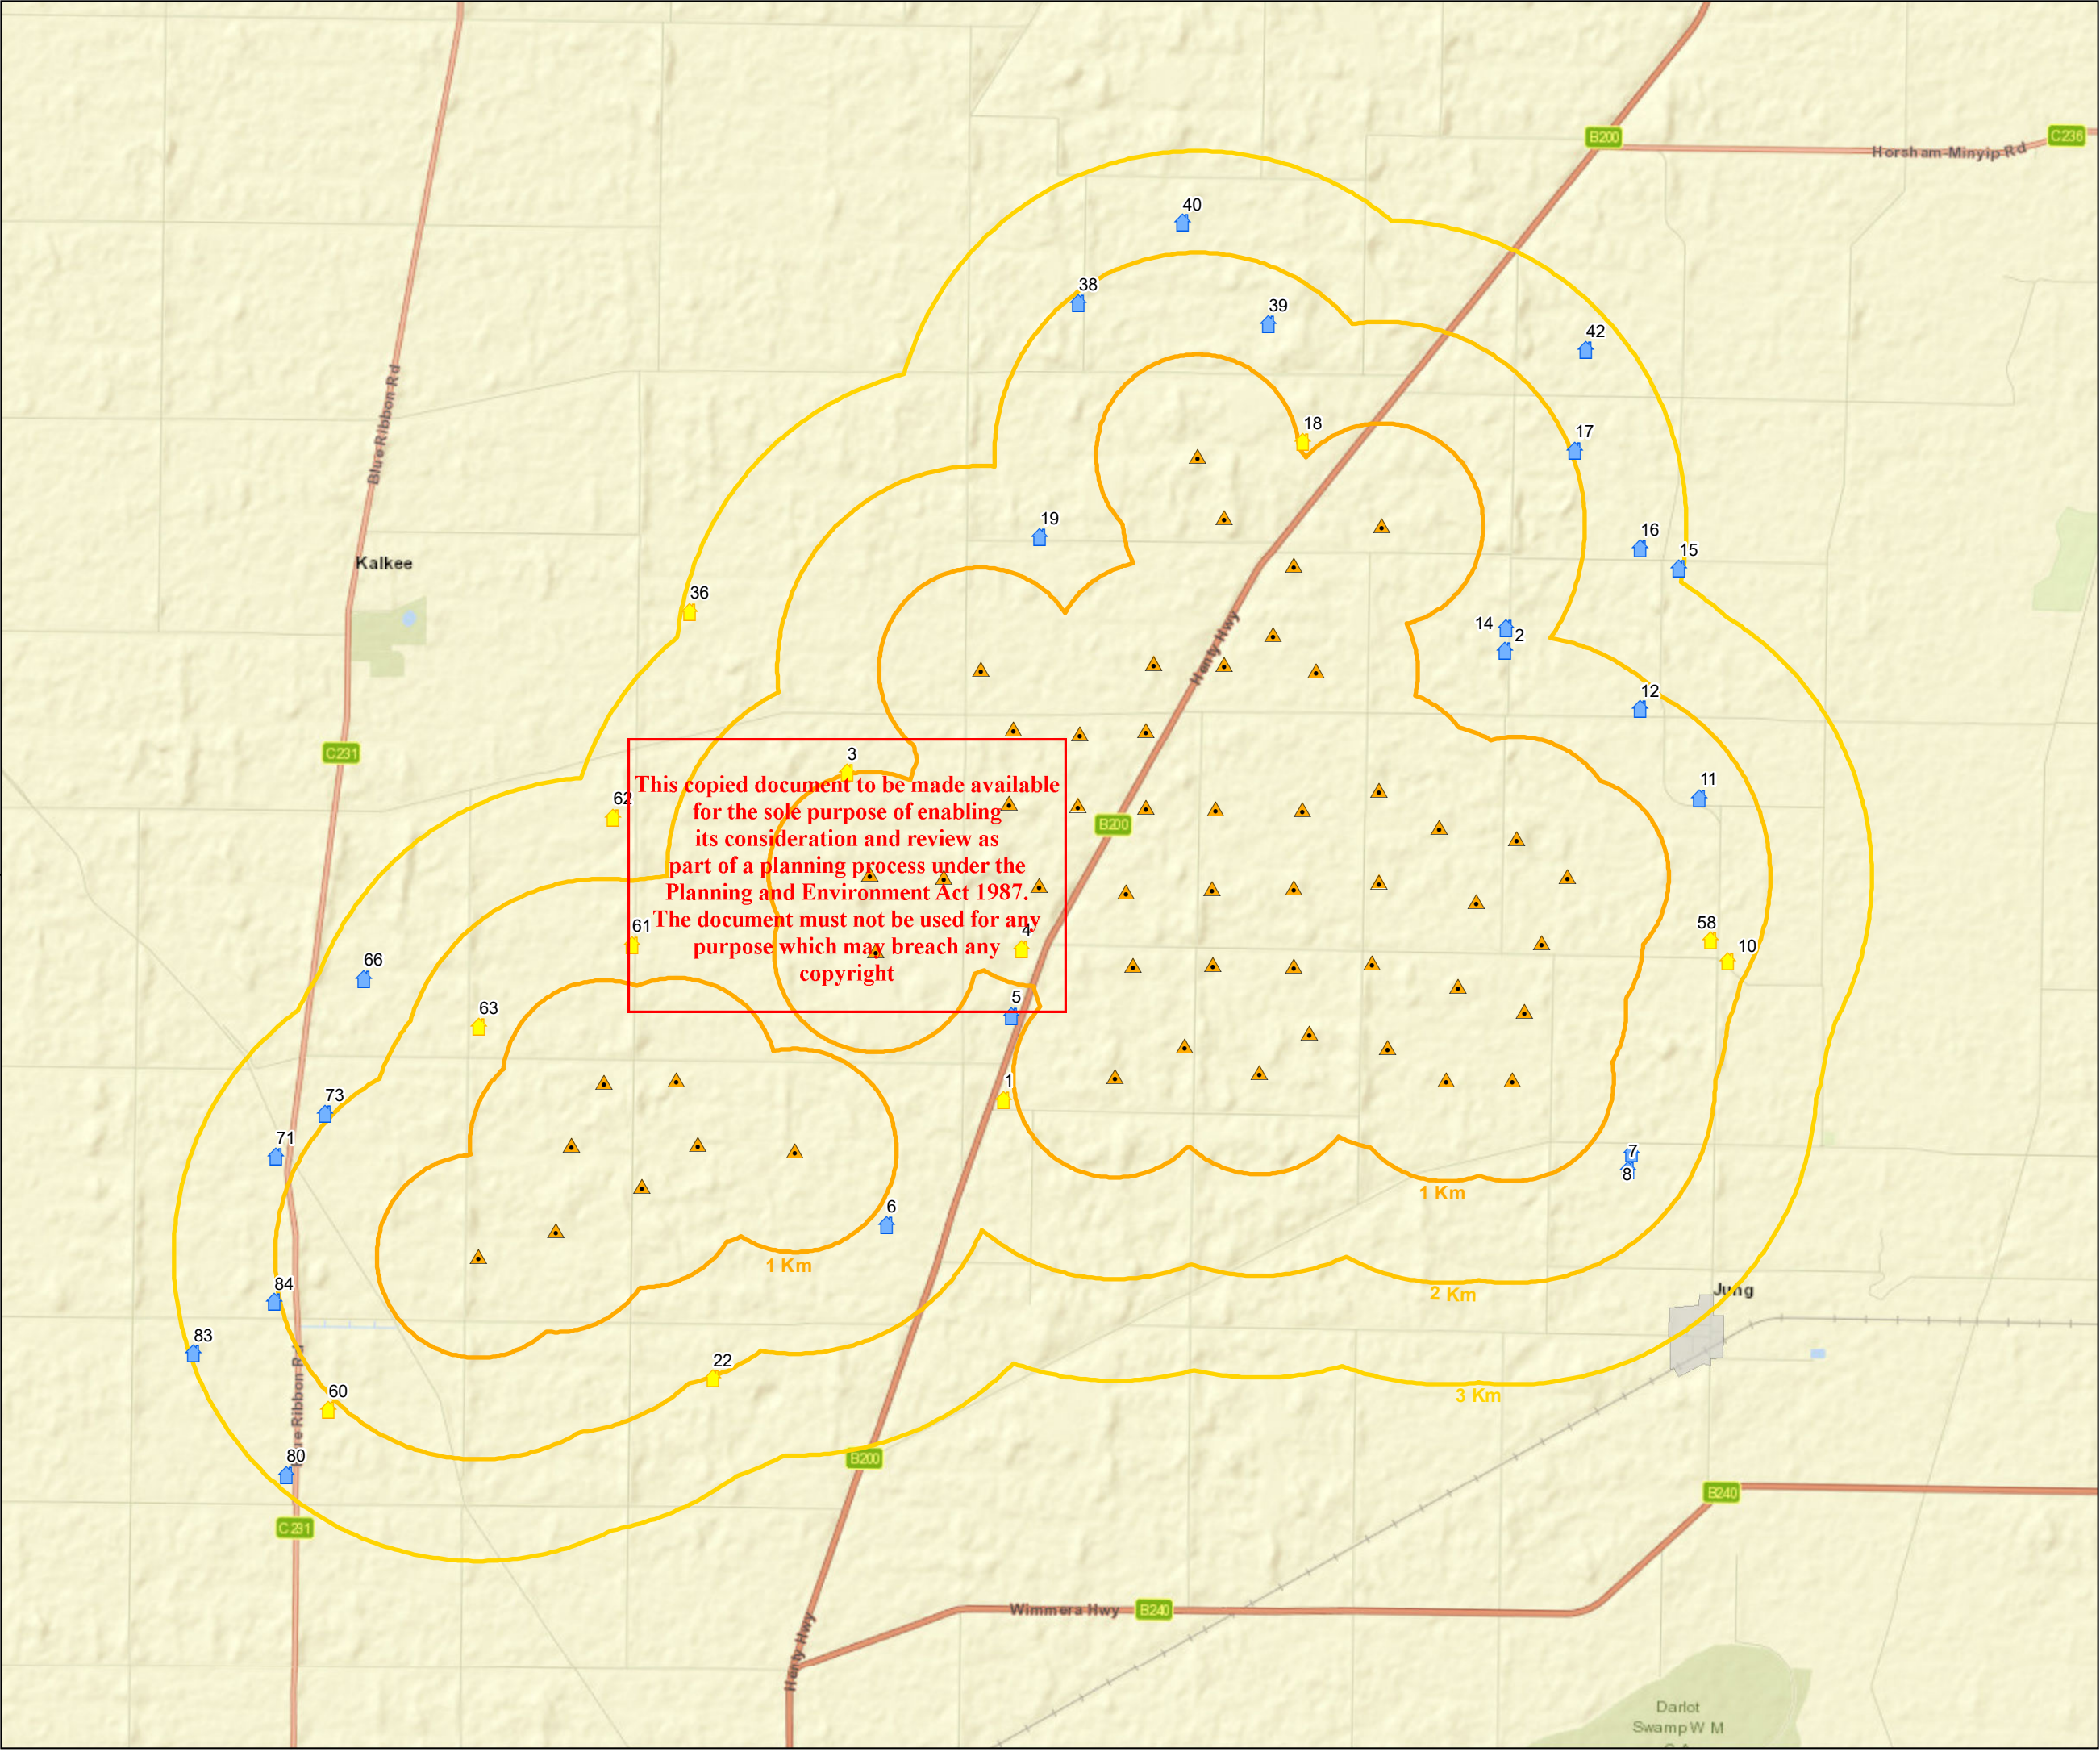

5.3. Results

A summary of the results of the worst case scenario Shadow Flicker Assessment for the Wimmera Plains Energy Facility is presented in the table below. Full results can be found on the WindPro report included as an appendix to the present report.

Table 4. Shadow Flicker Assessment Results

Modelled Shadow Flicker (hours/year)	Participant Receptor	Non-Participant Receptor	Total
<30	11	22	33
≥30	1	0	1
Total	12	22	34

The table above shows that only one receptor is above the limit of 30 hours of shadow flicker per year. As it can be seen on the full WindPro report in appendix, this receptor (ID 4) is a participant landowner in the project and a host for wind turbines and other infrastructure. This owner has entered into an agreement waiving the requirement, in accordance with the shadow flicker guidelines. All non-participant landowners are expected to receive 0 hours of shadow flicker per year.

As discussed in previous sections and in accordance with the Guidelines, further investigation is deemed to be undertaken only where a non-participant receptor is predicted to have more than 30 hours of shadow flicker per year.

The figure below shows the graphic representation of the modelled shadow flicker.

ADVERTISED PLAN

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Figure 3. Modelled Shadow Flicker


**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**


Wimmera Plains Energy Facility


Predicted Shadow Flicker

Legend


 Turbine Location


Dwelling

 Non-stakeholder


 Stakeholder

Hours per year, worst case

 0.1 - 30.0

 30.1 - 650.0

ADVERTISED
PLAN




Scale at A3:
1:40,000

0 1 2 Km



Date: 07/21/2020

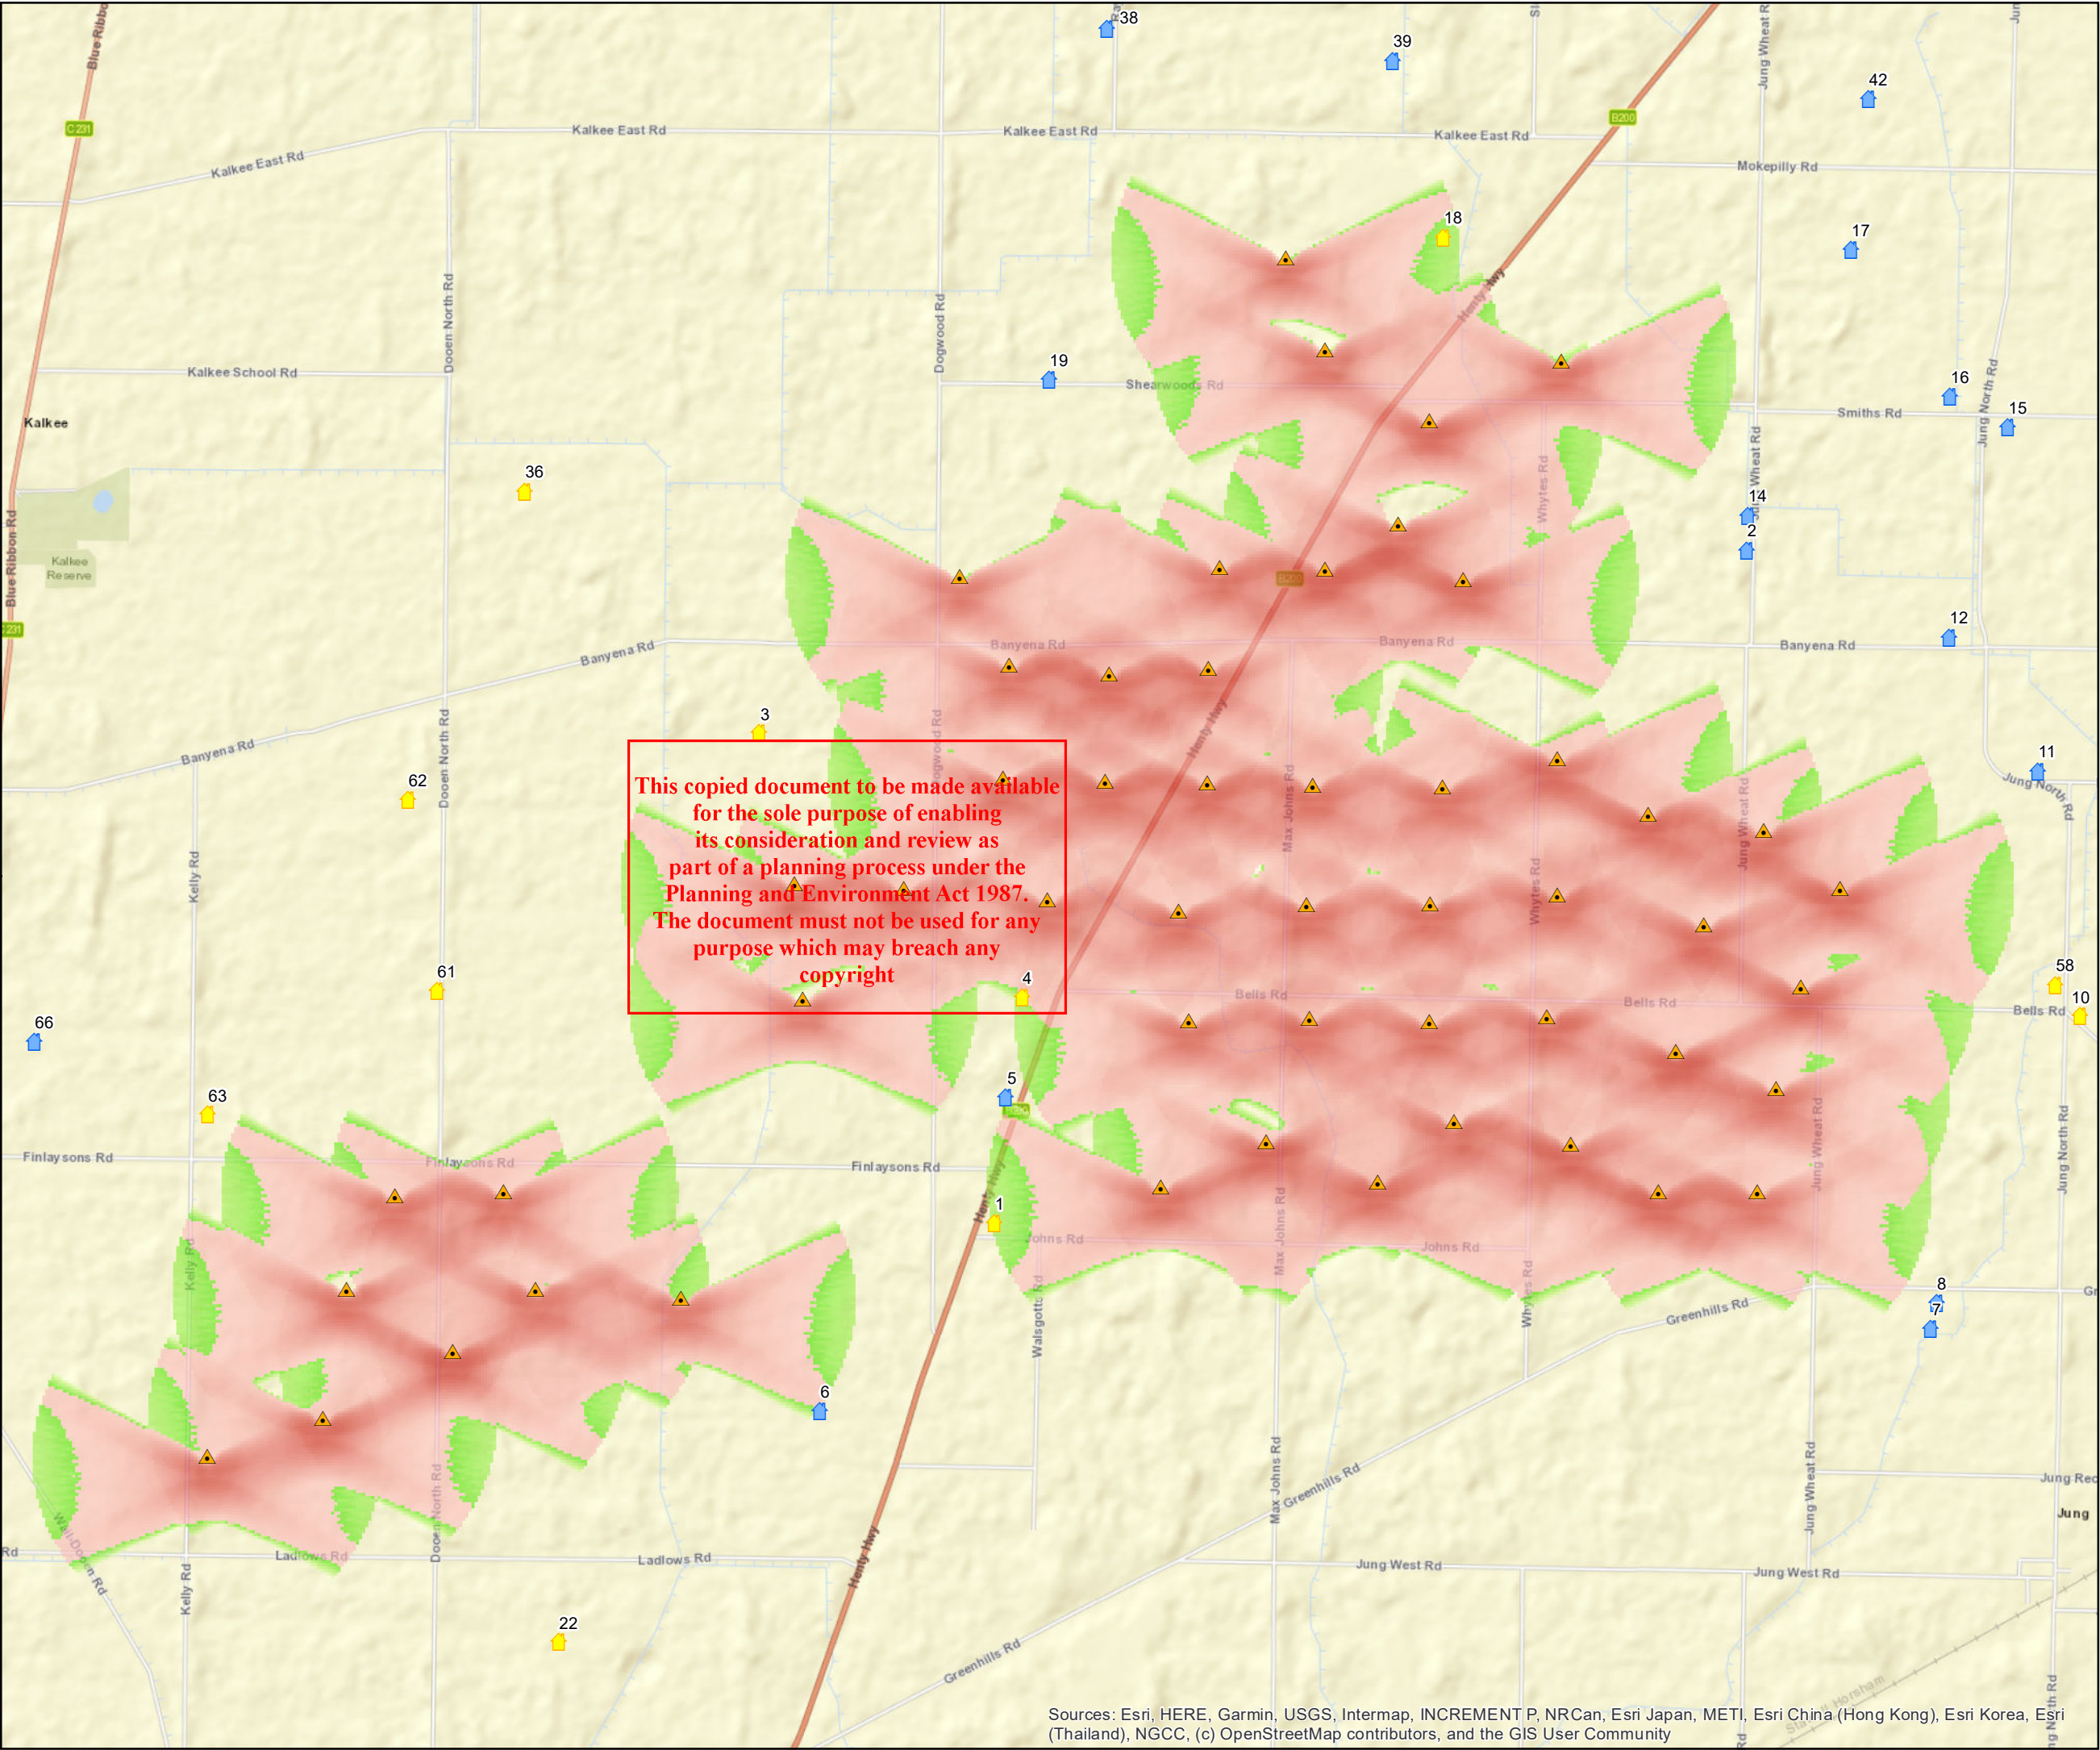

6. Conclusion

An assessment based on worst case conditions of the shadow flicker caused by the 52 wind turbines of the Wimmera Plains Energy Facility has been undertaken following the recommendations of the Guidelines. A total of 34 dwellings (receptors) were identified within 3 km of the wind turbines, comprising 12 participant landowners and 22 non-participant landowners. All non-participant landowners are below the 30 hours of shadow flicker per year limit and therefore no additional investigation is deemed necessary. 1 participant landowner will receive greater than 30 hours of shadow flicker per year and this landowner has entered into an agreement waiving the requirement. For this reason, the project is deemed to be compliant with the Guidelines and Planning Provisions.

**ADVERTISED
PLAN**

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

ADVERTISED PLAN

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

ADVERTISED PLAN

SHADOW - Main Result

Assumptions for shadow calculations

Maximum distance for influence 1,145 m
Minimum sun height over horizon for influence 3 °
Day step for calculation 1 days
Time step for calculation 1 minutes
The calculated times are "worst case" given by the following assumptions:
The sun is shining all the day, from sunrise to sunset
The rotor plane is always perpendicular to the line from the WTG to the sun
The WTG is always operating


A ZVI (Zones of Visual Influence) calculation is performed before flicker calculation so non visible WTG do not contribute to calculated flicker values. A WTG will be visible if it is visible from any part of the receiver window. The ZVI calculation is based on the following assumptions:
Height contours used: Elevation Grid Data Object: WIM_EMDGrid_0.wpg (7)
Obstacles used in calculation
Eye height for map: 1.5 m
Grid resolution: 1.0 m

All coordinates are in
UTM (south)-WGS84 Zone: 54

WTGs

Row data	Easting	Southing	Z	Description	WTG type	Valid manufacturer type generator	Power, rated [kW]	Rotor diameter [m]	Hub height [m]	RPM [RPM]
T01	619,688	5,950,302	137.9	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T02	619,038	5,950,302	136.9	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T03	618,466	5,950,616	139.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T04	617,696	5,950,763	139.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T05	617,200	5,950,371	140.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T06	616,469	5,950,635	144.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T07	615,777	5,950,339	143.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T08	615,957	5,951,427	142.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T09	616,748	5,951,442	141.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T10	617,536	5,951,419	139.6	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T11	618,309	5,951,457	138.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T12	619,157	5,951,224	137.3	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T13	619,810	5,950,981	138.4	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T14	619,974	5,951,652	137.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T15	620,230	5,952,297	136.9	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T16	619,337	5,952,057	137.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T17	618,376	5,952,252	137.4	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T18	617,543	5,952,192	140.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T19	616,733	5,952,185	141.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T20	615,893	5,952,147	141.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T21	616,080	5,952,987	140.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T22	616,771	5,952,972	140.5	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T23	617,626	5,952,957	139.5	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T24	618,379	5,953,147	137.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T25	618,970	5,952,782	136.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T26	619,730	5,952,674	135.9	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T27	617,761	5,954,323	138.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T28	616,853	5,954,390	139.4	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T29	617,333	5,954,683	138.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T30	618,404	5,955,757	136.3	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T31	617,538	5,955,364	138.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T32	616,852	5,955,834	141.3	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T33	616,593	5,956,437	139.4	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T34	616,159	5,954,401	139.4	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T35	614,455	5,954,338	138.6	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T36	614,782	5,953,760	140.1	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T37	615,434	5,953,704	139.7	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T38	616,088	5,953,738	141.0	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T39	615,412	5,953,002	139.5	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0
T40	614,737	5,953,017	140.6	VESTAS V162 5.6MW HH: 166m tip: 247m	Yes	VESTAS V162-5,600	5,600	162.0	166.0	0.0

To be continued on next page...

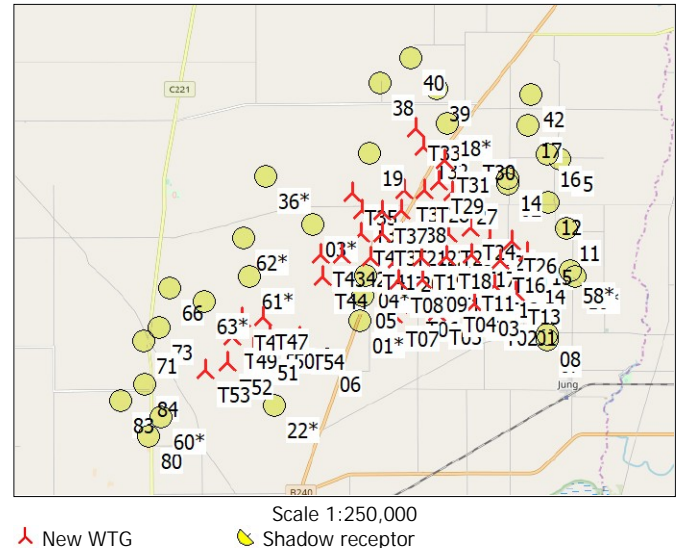

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

SHADOW - Main Result

...continued from previous page

	Easting	Southing	Z	Row data/Description	WTG type		Power, rated [kW]	Rotor diameter [m]	Hub height [m]	RPM [RPM]	
					Valid	Manufact.					Type-generator
			[m]								
T41	615,031	5,952,219	143.0	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T42	614,090	5,952,296	140.6	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T43	613,368	5,952,328	139.6	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T44	613,423	5,951,573	139.6	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T47	611,458	5,950,302	136.4	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T48	610,749	5,950,278	133.8	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T49	610,429	5,949,663	133.9	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T50	611,671	5,949,664	137.3	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T51	611,125	5,949,257	135.1	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T52	610,273	5,948,818	134.3	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T53	609,512	5,948,566	133.9	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0
T54	612,628	5,949,604	141.6	VESTAS V162 5.6MW HH:166m tip:247m	Yes	VESTAS	V162-5,600	5,600	162.0	166.0	0.0

Shadow receptor-Input

No.	Name	Easting	Southing	Z	Width	Height	Elevation	Slope of	Direction mode	Eye height
							a.g.l.	window		(ZVI) a.g.l.
				[m]	[m]	[m]	[m]	[°]		[m]
01*	ID 01*	614,683	5,950,101	145.3	1.0	1.5	0.0	90.0	"Green house mode"	1.5
02	ID 02	619,626	5,954,517	136.3	1.0	1.5	0.0	90.0	"Green house mode"	1.5
03*	ID 03*	613,143	5,953,314	144.4	1.0	1.5	0.0	90.0	"Green house mode"	1.5
04*	ID 04*	614,867	5,951,583	143.2	1.0	1.5	0.0	90.0	"Green house mode"	1.5
05	ID 05	614,762	5,950,924	142.5	1.0	1.5	0.0	90.0	"Green house mode"	1.5
06	ID 06	613,536	5,948,867	143.4	1.0	1.5	0.0	90.0	"Green house mode"	1.5
07	ID 07	620,832	5,949,409	141.7	1.0	1.5	0.0	90.0	"Green house mode"	1.5
08	ID 08	620,871	5,949,576	142.1	1.0	1.5	0.0	90.0	"Green house mode"	1.5
10*	ID 10*	621,813	5,951,460	143.6	1.0	1.5	0.0	90.0	"Green house mode"	1.5
11	ID 11	621,535	5,953,066	139.6	1.0	1.5	0.0	90.0	"Green house mode"	1.5
12	ID 12	620,948	5,953,943	135.8	1.0	1.5	0.0	90.0	"Green house mode"	1.5
14	ID 14	619,632	5,954,743	135.6	1.0	1.5	0.0	90.0	"Green house mode"	1.5
15	ID 15	621,335	5,955,324	136.9	1.0	1.5	0.0	90.0	"Green house mode"	1.5
16	ID 16	620,955	5,955,524	136.0	1.0	1.5	0.0	90.0	"Green house mode"	1.5
17	ID 17	620,310	5,956,485	135.2	1.0	1.5	0.0	90.0	"Green house mode"	1.5
18*	ID 18*	617,633	5,956,569	141.3	1.0	1.5	0.0	90.0	"Green house mode"	1.5
19	ID 19	615,046	5,955,633	139.7	1.0	1.5	0.0	90.0	"Green house mode"	1.5
22*	ID 22*	611,823	5,947,355	140.3	1.0	1.5	0.0	90.0	"Green house mode"	1.5
36*	ID 36*	611,600	5,954,903	137.7	1.0	1.5	0.0	90.0	"Green house mode"	1.5
38	ID 38	615,424	5,957,939	140.2	1.0	1.5	0.0	90.0	"Green house mode"	1.5
39	ID 39	617,297	5,957,730	138.2	1.0	1.5	0.0	90.0	"Green house mode"	1.5
40	ID 40	616,448	5,958,725	139.5	1.0	1.5	0.0	90.0	"Green house mode"	1.5
42	ID 42	620,421	5,957,478	134.8	1.0	1.5	0.0	90.0	"Green house mode"	1.5
58*	ID 58*	621,646	5,951,665	140.9	1.0	1.5	0.0	90.0	"Green house mode"	1.5
60*	ID 60*	608,041	5,947,051	135.2	1.0	1.5	0.0	90.0	"Green house mode"	1.5
61*	ID 61*	611,026	5,951,627	133.7	1.0	1.5	0.0	90.0	"Green house mode"	1.5
62*	ID 62*	610,840	5,952,878	134.0	1.0	1.5	0.0	90.0	"Green house mode"	1.5
63*	ID 63*	609,525	5,950,816	132.7	1.0	1.5	0.0	90.0	"Green house mode"	1.5
66	ID 66	608,385	5,951,289	133.9	1.0	1.5	0.0	90.0	"Green house mode"	1.5
71	ID 71	607,522	5,949,538	131.8	1.0	1.5	0.0	90.0	"Green house mode"	1.5
73	ID 73	608,005	5,949,963	132.6	1.0	1.5	0.0	90.0	"Green house mode"	1.5
80	ID 80	607,624	5,946,412	134.5	1.0	1.5	0.0	90.0	"Green house mode"	1.5
83	ID 83	606,712	5,947,601	137.0	1.0	1.5	0.0	90.0	"Green house mode"	1.5
84	ID 84	607,509	5,948,109	132.9	1.0	1.5	0.0	90.0	"Green house mode"	1.5

Calculation Results

Shadow receptor

No.	Name	Shadow, worst case		
		Shadow hours per year [h/year]	Shadow days per year [days/year]	Max shadow hours per day [h/day]
01*	ID 01*	18:56	44	0:33
02	ID 02	0:00	0	0:00
03*	ID 03*	0:00	0	0:00

To be continued on next page...

**ADVERTISED
PLAN**

SHADOW - Main Result

...continued from previous page

No.	Name	Shadow, worst case		
		Shadow hours per year [h/year]	Shadow days per year [days/year]	Max shadow hours per day [h/day]
04*	ID 04*	40:44	94	0:35
05	ID 05	0:00	0	0:00
06	ID 06	0:00	0	0:00
07	ID 07	0:00	0	0:00
08	ID 08	0:00	0	0:00
10*	ID 10*	0:00	0	0:00
11	ID 11	0:00	0	0:00
12	ID 12	0:00	0	0:00
14	ID 14	0:00	0	0:00
15	ID 15	0:00	0	0:00
16	ID 16	0:00	0	0:00
17	ID 17	0:00	0	0:00
18*	ID 18*	23:53	51	0:36
19	ID 19	0:00	0	0:00
22*	ID 22*	0:00	0	0:00
36*	ID 36*	0:00	0	0:00
38	ID 38	0:00	0	0:00
39	ID 39	0:00	0	0:00
40	ID 40	0:00	0	0:00
42	ID 42	0:00	0	0:00
58*	ID 58*	0:00	0	0:00
60*	ID 60*	0:00	0	0:00
61*	ID 61*	0:00	0	0:00
62*	ID 62*	0:00	0	0:00
63*	ID 63*	0:00	0	0:00
66	ID 66	0:00	0	0:00
71	ID 71	0:00	0	0:00
73	ID 73	0:00	0	0:00
80	ID 80	0:00	0	0:00
83	ID 83	0:00	0	0:00
84	ID 84	0:00	0	0:00

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

**ADVERTISED
PLAN**

Total amount of flickering on the shadow receptors caused by each WTG

No.	Name	Worst case
		[h/year]
T01	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T02	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T03	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T04	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T05	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T06	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T07	VESTAS V162 5.6MW HH:166m tip:247m	18:56
T08	VESTAS V162 5.6MW HH:166m tip:247m	21:17
T09	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T10	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T11	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T12	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T13	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T14	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T15	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T16	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T17	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T18	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T19	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T20	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T21	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T22	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T23	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T24	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T25	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T26	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T27	VESTAS V162 5.6MW HH:166m tip:247m	0:00

To be continued on next page...

SHADOW - Main Result

...continued from previous page

No.	Name	Worst case [h/year]
T28	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T29	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T30	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T31	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T32	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T33	VESTAS V162 5.6MW HH:166m tip:247m	23:53
T34	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T35	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T36	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T37	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T38	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T39	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T40	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T41	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T42	VESTAS V162 5.6MW HH:166m tip:247m	19:27
T43	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T44	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T47	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T48	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T49	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T50	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T51	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T52	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T53	VESTAS V162 5.6MW HH:166m tip:247m	0:00
T54	VESTAS V162 5.6MW HH:166m tip:247m	0:00

**This copied document to be made available
for the sole purpose of enabling
its consideration and review as
part of a planning process under the
Planning and Environment Act 1987.
The document must not be used for any
purpose which may breach any
copyright**

Total times in Receptor wise and WTG wise tables can differ, as a WTG can lead to flicker at 2 or more receptors simultaneously and/or receptors may receive flicker from 2 or more WTGs simultaneously.

**ADVERTISED
PLAN**